

# **Adaptive Droop Voltage Control on Parallel Connected Converters for DC Microgrid Systems**

Turkish Online Journal of Qualitative Inquiry (TOJQI)

Volume 12, Issue 5, July, 2021: 4478-4491

Research Article

## **Adaptive Droop Voltage Control on Parallel Connected Converters for DC Microgrid Systems**

**R. Pradeep<sup>1</sup>, Tilahun Kochito<sup>2</sup>, K. Rayudu<sup>3</sup>, A. Jaya Laxmi<sup>4</sup>**

<sup>1</sup>Assistant Professor, EEE, MRCET, Medchal, Telangana, India, [eca.pradeep@gmail.com](mailto:eca.pradeep@gmail.com)

<sup>2</sup>Lecturer, ECE, Mizan-Tepi University, Ethiopia. [tilekzb12@mail.com](mailto:tilekzb12@mail.com)

<sup>3</sup>Professor, EEE, BVRIT-Narsapur, Telangana, India. [rayudu.katuri@bvrit.ac.in](mailto:rayudu.katuri@bvrit.ac.in)

<sup>4</sup>Professor, EEE, JNTUHCEH, Telangana, India, [ajl1994@jntuh.ac](mailto:ajl1994@jntuh.ac).

### **Abstract**

Distributed Generators (DGs) are widely used as power sources in power system. The converters and control algorithm are used for sharing current between the load and microgrid. The three control types - centralized, decentralized and master-slave are used in DGs, have their deficiency to maintain continuous power supply. The communication link between master-slave makes time delay and affects controlling system. The traditional droop control set point according to load is the main problem for DC micro-grid. This paper mainly deals with, an adaptive and flexible control of microgrid with parallel operation of converters to maintain the system stable for any load. The solar PV, wind generator and batteries are connected in parallel to microgrid and its performance is simulated and analyzed by MATLAB 2019a Simulink.

**Keywords**— Solar PV, wind turbine, converter, dc microgrid control, current sharing and adaptive droop control algorithm

## I. INTRODUCTION


Electric power is one of the main sources for human being's daily life. Renewable energy, which is simple to use in rural areas, has many economic and environmental advantages. As we know, distributed generations and storage batteries are connected together.

The converters are connected together in parallel connection for continuous power supply. Energy storage batteries are used as backup as well as additional source for the grid. Several current sharing methods like centralized, master-slave and traditional droop control methods are used, but advancing control algorithm to increase the efficiency and availability of the power. In this system, the drawback of the master slave converter can be overcome by using Parallel converter. Circulating current minimization is basic for control design. Design of adaptive system, which controls current circulation performance and converter load running, is valued [1].

The parallel operation of converters is used for continuity of power to load in a DC microgrid. This system is advantageous because all converters connected to the system are operated to maintain continuous power supply. Depends on the load connected, system gives priority and the converters are operated [2]. This type of design for microgrid is very important because in case any failure in any one of the converters then the other converter works as usual and possible for maintenance without discontinuity of load for the system. Distributed generator is connected to a DC/DC in PV panel and AC/DC, DC/DC in wind energy generation. DGs connected in parallel operation to boost converter for PV and buck converter for wind energy generation. The parallel connected converters to DC bus share current and enhance the performance of the system (DC-

## Adaptive Droop Voltage Control on Parallel Connected Converters for DC Microgrid Systems

DC) converters [3]. The droop control method relies on impedance between the output of each unit and DC-grid and the load impedance  $R_L$ .

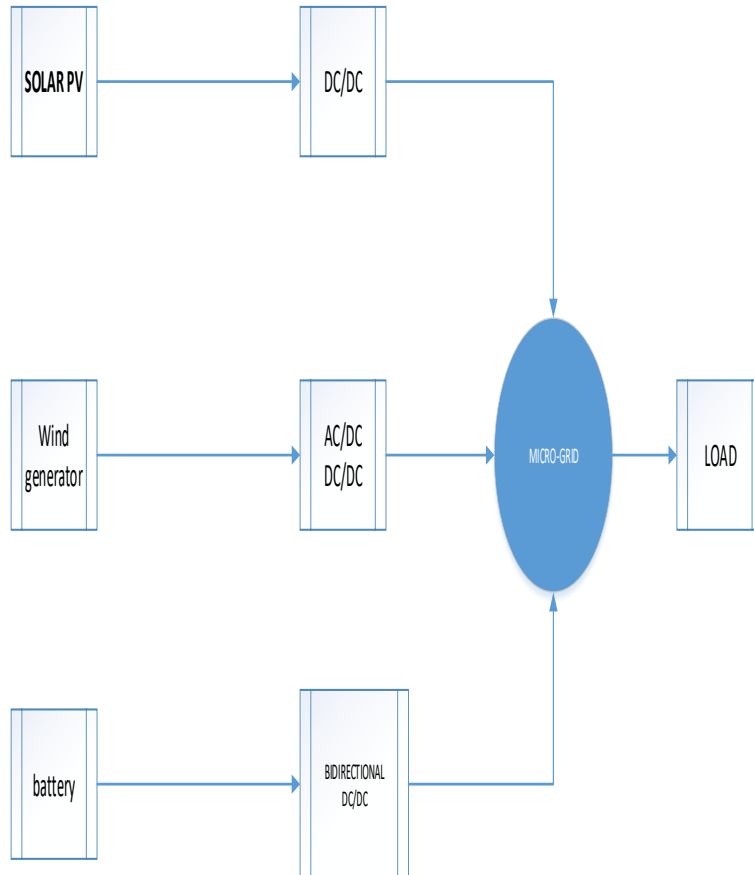


**Fig.1 Parallel connection**

## II. Classical approach for droop control

This approach completes the parallel connected converters, which have its own DC-voltage ( $V_{dc}$ ), and Current ( $I$ ) connected to DC-bus and the terminal voltage. The output voltage of solar is maintained at maximum by using a P&O MPT algorithm then boosted to set the voltage. Wind energy also generates AC voltage converted to DC by rectification process and using a

buck converter to maintain at the DC bus level. The battery is also connected to the DC-bus using bidirectional converters for charging and discharging to maintain the power and based on SoC it will be controlled by coding algorithm [4].

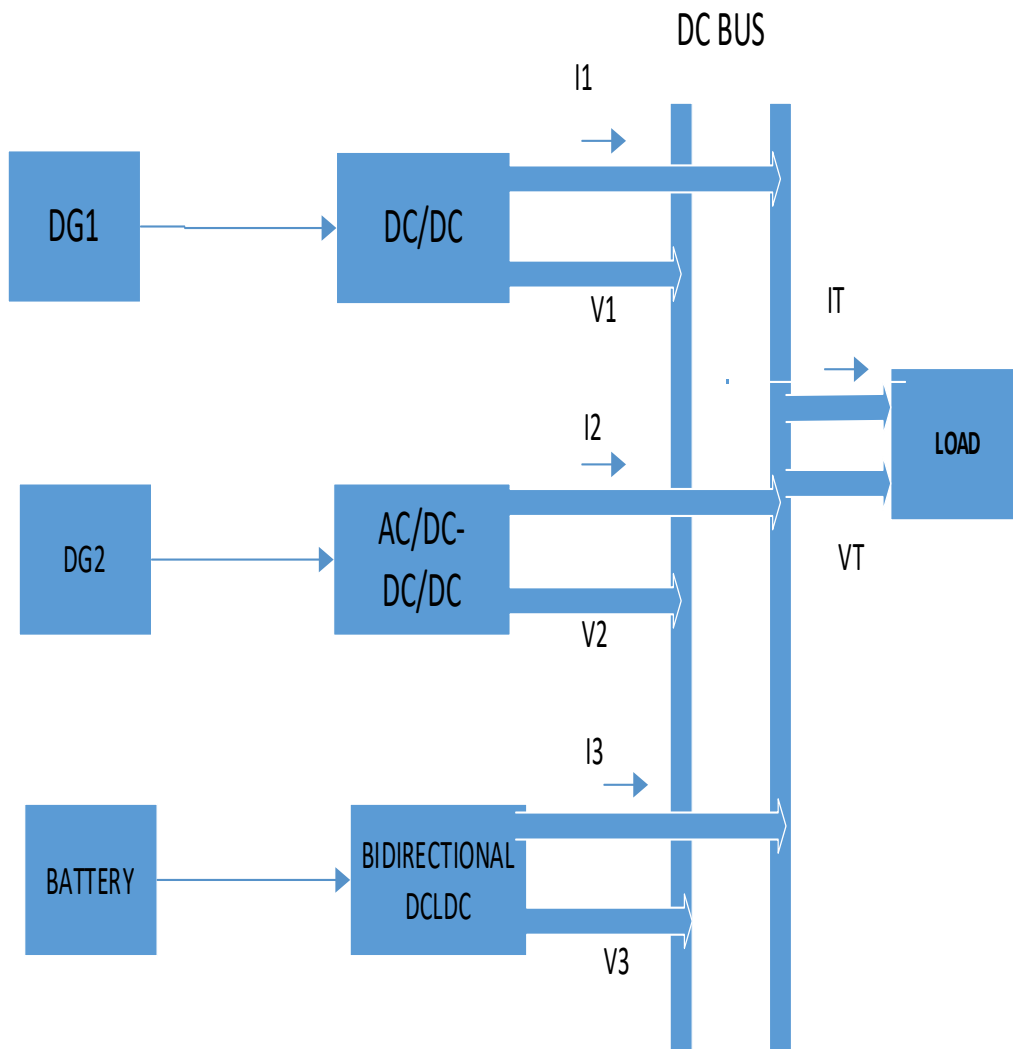

**Fig.2 Classical droop control**


Fig.2 shows that two DGs (solar PV and wind energy) have  $v_1, I_1$  and  $v_2, I_2$  from converters is directly connected to a DC-bus and the battery system to [5].

## Adaptive Droop Voltage Control on Parallel Connected Converters for DC Microgrid Systems

The drawback of classic droop control is that it does not update the output. The output for any unit of converter is found by using set point for each converter and the gain is also considered to maintain an approach to reference voltage. [6]

### III. System adaptive droop control

The set point for each converter is sated. Integrating renewable energy sources by using power electronic interfaces gives flexibility in conversion and power level. DC microgrid plays a major role, as it is highly efficient, reliable, controllable and economical. In DC microgrid system, converters are used to interconnect renewable sources and loads [7]- [8].

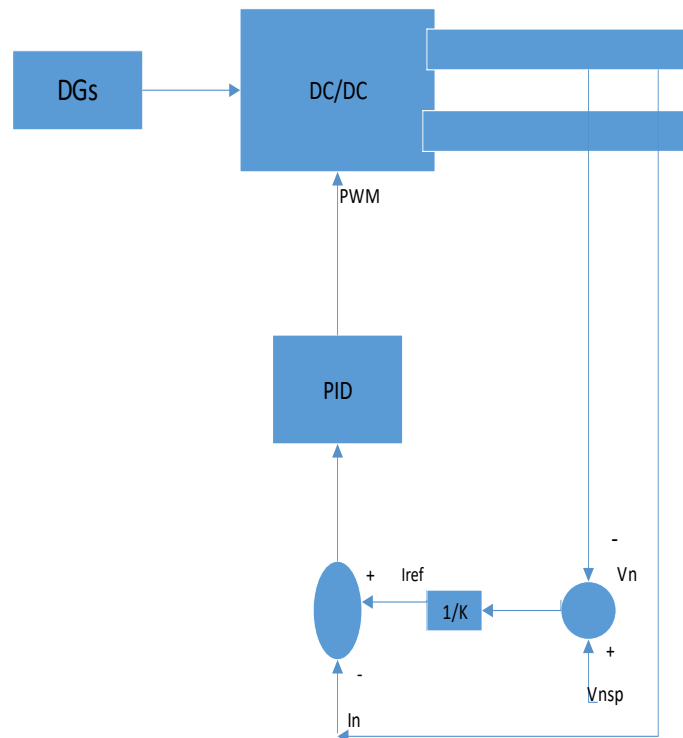


**Fig.3 Control scheme for single unit.**

This control method updates the output voltage set point of each converter. In fig.3,  $V_n$ , converter output and  $V_{ref} (V_{nsp})$  reference voltage with  $I_n$  and  $I_{ref}$  is output from gain combined with a PI controller to control the pulse of boost and buck converter [9]- [10].

#### IV. The Design of adaptive model controller

The designed model is combination of boost converters for solar PV, buck converters for wind energy and bidirectional converters designed for battery management in the system.

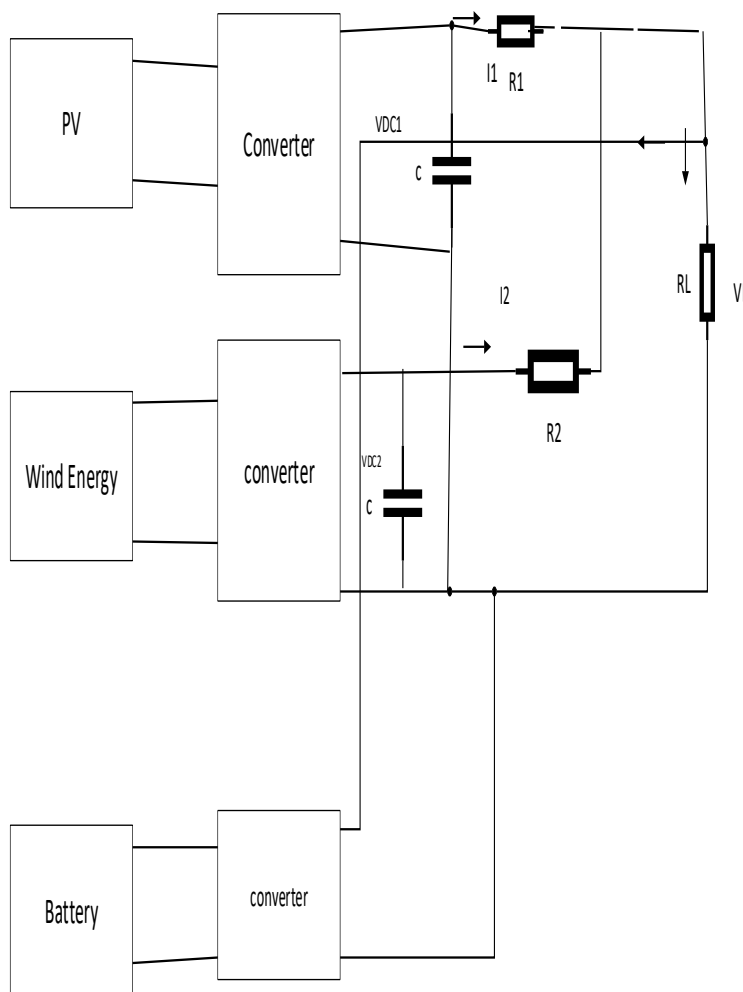

**Fig.4 Converter combination.**

**V. Performance analysis of parallel converter**

The voltage  $V_{DC1}$  and  $V_{DC2}$  are the output voltages of converters (solar PV and wind energy) respectively with their currents  $I_1$  and  $I_2$ . There are circulating currents between converters  $I_{C1}$  &  $I_{C2}$  i.e. the two converters.

$$V_{DC1} - I_1 R_1 - I_L R_L = 0 \quad (1)$$

$$V_{DC2} - I_2 R_2 - I_L R_L = 0 \quad (2)$$

The currents  $I_1$  and  $I_2$  are derived from (1) and (2) and the circulating current between the converters are equal and opposite direction and it is  $I_{C12} = -I_{C21}$ .

$$I_{C12} = -I_{C21} = \frac{(V_{DC1} - V_{DC2})}{(R_1 + R_2)} \quad (3)$$

$$= (I_1 - I_2)/2 \quad \text{if } (R_1 = R_2) \quad (4)$$

$$= \frac{(I_1 R_1 - I_2 R_2)}{R_1 + R_2} \quad \text{if } (R_1 \neq R_2) \quad (5)$$

The voltage and circulating currents from converter-1 and converter-2 are  $V_{DC1}$ ,  $I_1$  and  $V_{DC2}$ ,  $I_2$  respectively. The circulating currents for the two converters can be obtained from eqn. (1) and (2).

$$I_1 = \frac{(R_2 + R_L)V_{DC1} - R_L V_{DC2}}{R_1 R_2 + R_1 R_L + R_2 R_L} \quad (6)$$

$$I_2 = \frac{(R_1 + R_L)V_{DC2} - R_L V_{DC1}}{R_1 R_2 + R_1 R_L + R_2 R_L} \quad (7)$$


If the voltage in resistor  $R_1$  and resistor  $R_2$  in the converter set are same (equal), then the circulating current becomes zero. In case, the set point of converters is different or the resistance  $R_1$  and resistance  $R_2$  are not equal, then  $R_{droop}$  is added to the converters to minimize the circulating current. Fig.4 will be modified by adding the resistance  $R_{droop}$ , which is variable and the circulating current can be minimized. The  $R_{droop}$  ( $R_{droop1}$  and  $R_{droop2}$ ) added for both converters and new DC voltage will be as follows.

$$V_{DC (new)} = V_{DC} - I_{DC} * R_{droop} \quad (8)$$

Where,  $I_{DC}$  is the current flow in converter.

## VI. Battery management system operation

Battery and its control system is shown in Fig. 5

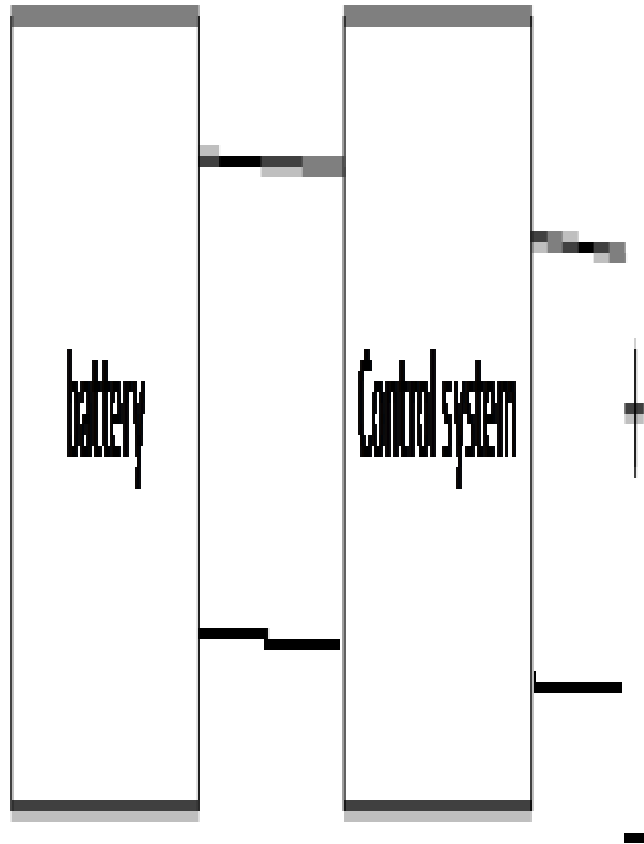

**Fig. 5 Battery management system**

The battery control system for storage is used to achieve the energy management. This can be performed by using an algorithm in which the system contains three modes. The system configuration is coded and used for controlling charge- discharge system with State of Charge.


Three modes are coded for switching the battery.



## Adaptive Droop Voltage Control on Parallel Connected Converters for DC Microgrid Systems

1. When SoC is greater than 80%, then the battery discharges and supports the load with bus connected.
2. When SoC is below 80%, both charging and discharging will be performed.
3. Finally, when SoC is below 40%, only charging mode is activated.


The mode and its operation can be performed by switching the bidirectional converters designed for charging and discharging of the battery system.

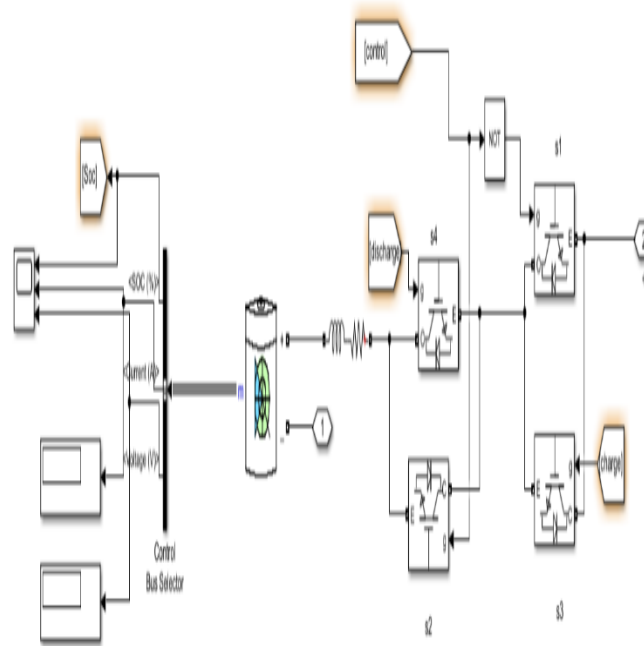

**Fig.6 Control system for battery**

In the Fig.6. The switch system has S1, S2, S3 and S4. When S1 and S4 are closed, the battery discharges and when s2 and s3 are closed the battery charges, as the switch direction

Shown in the fig.6. Charge-discharge can be based on SoC control algorithm depending on type of load and distribution resources.

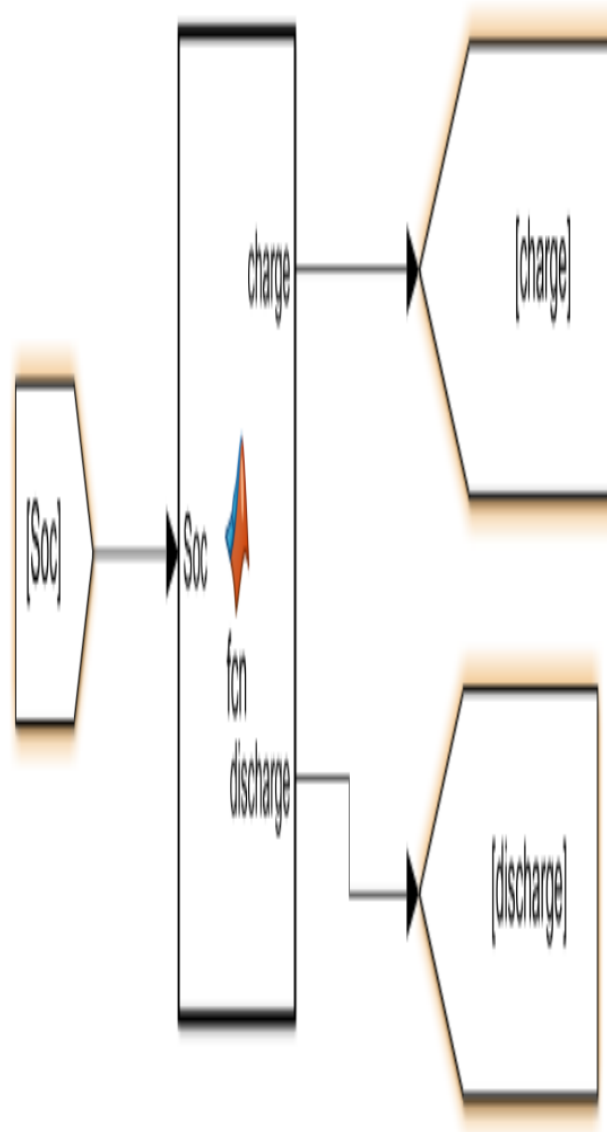

**Fig. 7 MATLAB Simulink model for battery charging and discharging**

Based on SoC, the algorithm is coded to perform the operation of the system with the three modes of operations as follows:

- i. Mode 1: Discharging Mode:

## **Adaptive Droop Voltage Control on Parallel Connected Converters for DC Microgrid Systems**

When  $V_{dc} < V_L$  by 80% i.e., SoC is greater than 80%, then the battery discharges and supports the load. During this mode, switch S1 and S4 are closed.

ii. Mode 2: Charging and Discharging Mode:


When  $V_{dc} > V_L$  by 80% i.e., SoC is below 80%, then both charging and discharging will be performed. During this mode, switch S1 and S4 are closed during charging & switch S2 and S3 are closed during discharging.

iii. Mode 3: Charging Mode:

When  $V_{dc} > V_L$  by 40% i.e., SoC is less than 40%, then the battery Charges and disconnected from the load. During this mode, switch S2 and S3 are closed.

### **VII. Simulation and analysis of output**

The MATLAB Simulink model for adaptive droop voltage control on parallel connected converters of the system is shown in fig.8 and both converters are connected in parallel to load. Boost converter to increase the output of solar pv voltage and a buck converter for wind power to regulate the voltage to reference one.

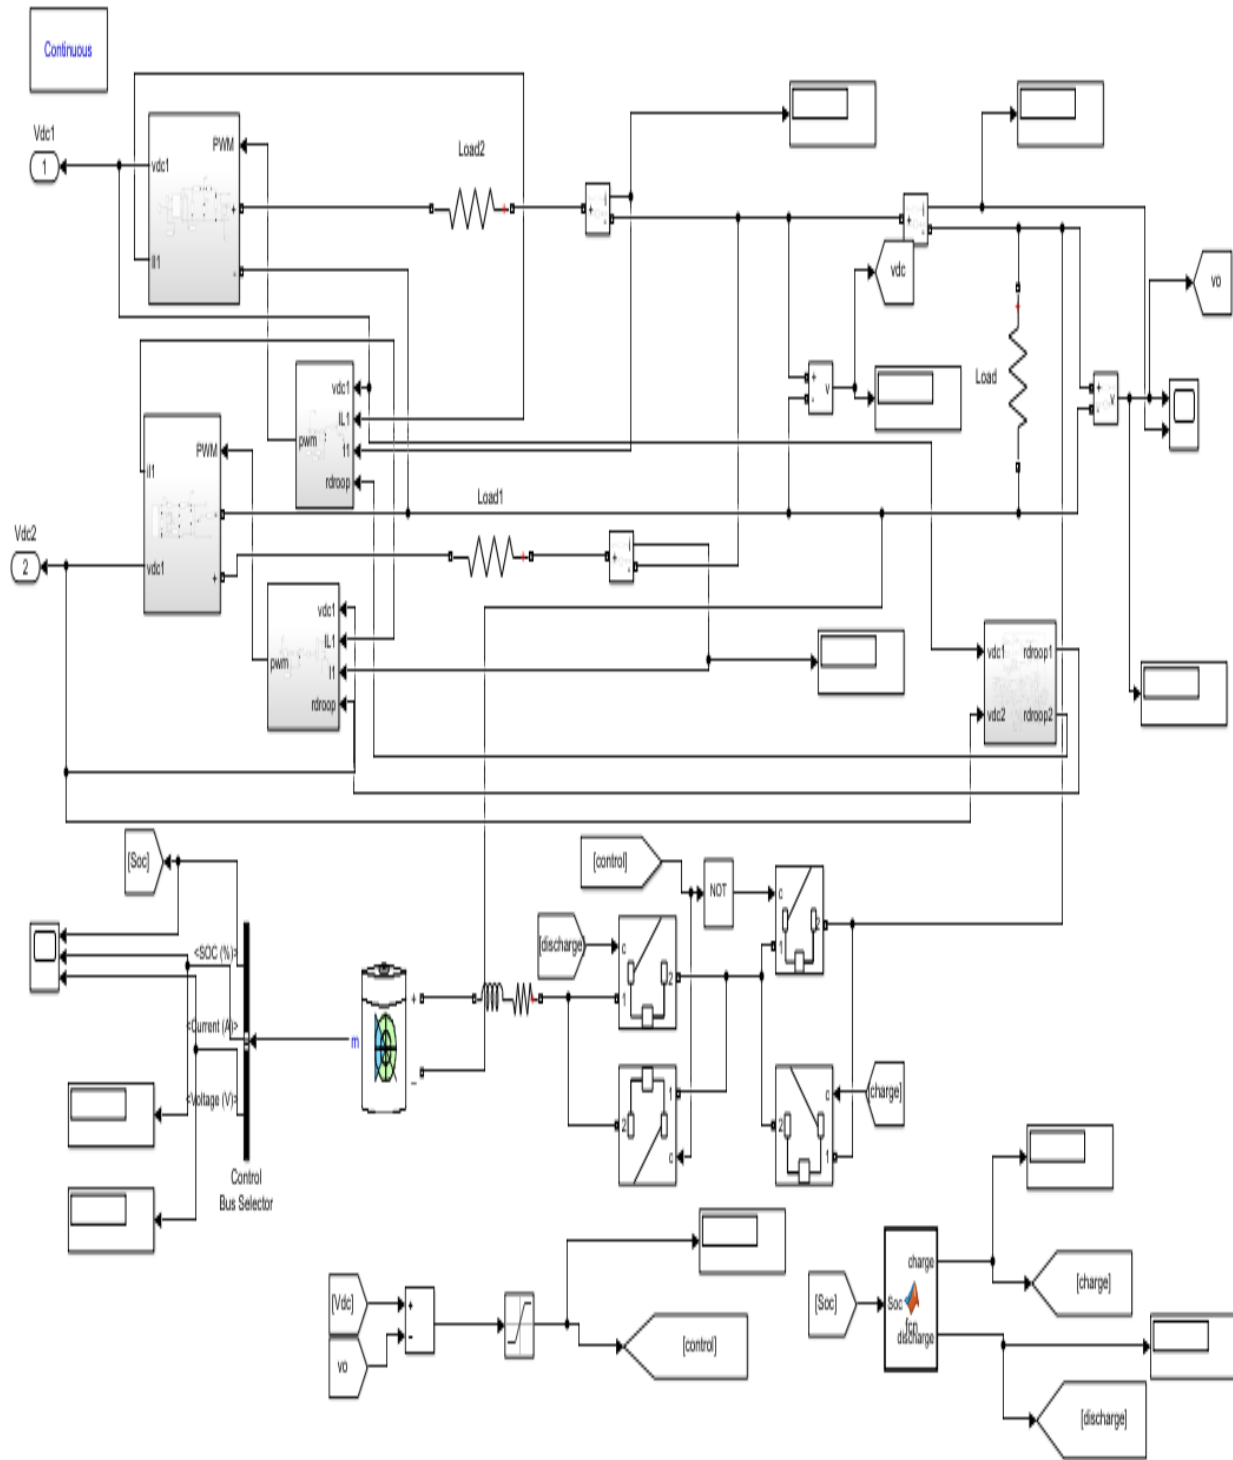


**Fig. 8 MATLAB Simulink model for adaptive droop voltage control on parallel connected converters**

## Adaptive Droop Voltage Control on Parallel Connected Converters for DC Microgrid Systems


for boost converter, input voltage is from PV, DC voltage of 31.5V, L and C are 422e-6H and 20.09e-6F respectively with  $R_{load}$  of 10 $\Omega$ . The reference voltage is 50V with a switching frequency of 4KHz for different solar irradiation. At irradiation of 526 and temperature of 26°C, the voltage 26.49V and power of the PV 165.2W model become maximum.

The buck converters have input voltage of DC 78V and output is set to 52V DC voltage. The resistance,  $R_1=R_2=10\Omega$  and  $R_L=100\Omega$  are used for this simulation.

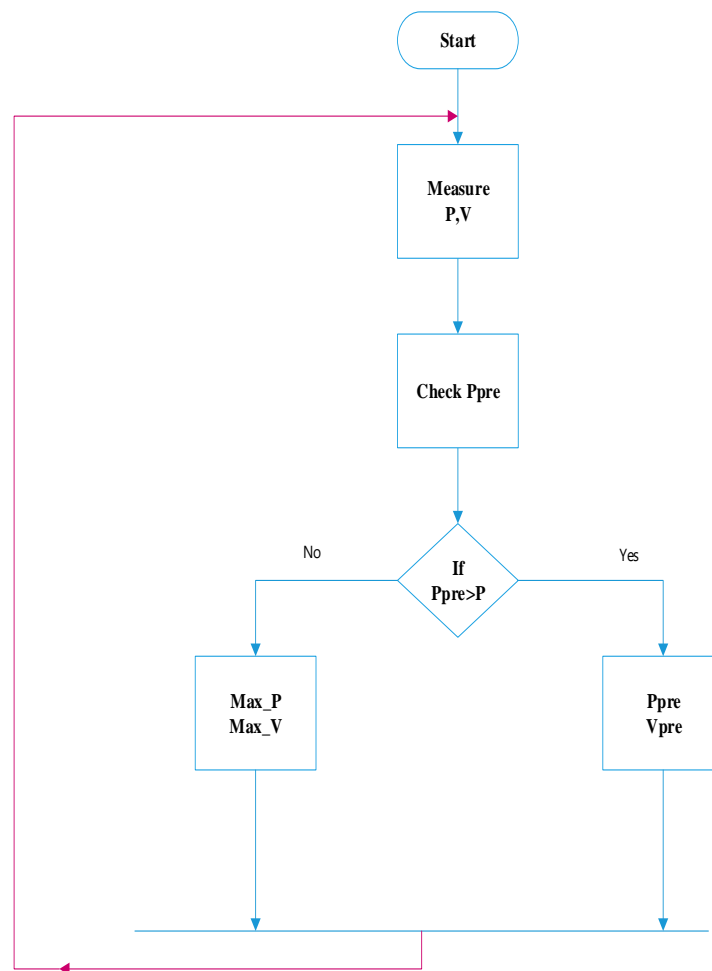


**Fig.9. flowchart of perturb & observation for PV model**

The circulation current  $I_1$  and  $I_2$  are input to the node and  $I_L$ (load current).

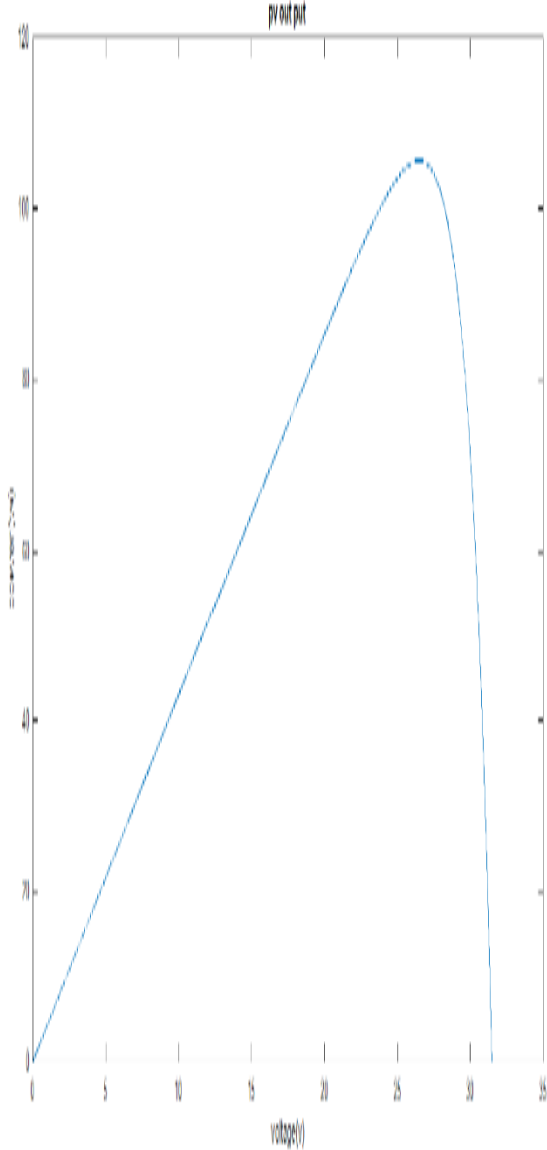


**Fig.10.a). Voltage –power characteristics of PV**

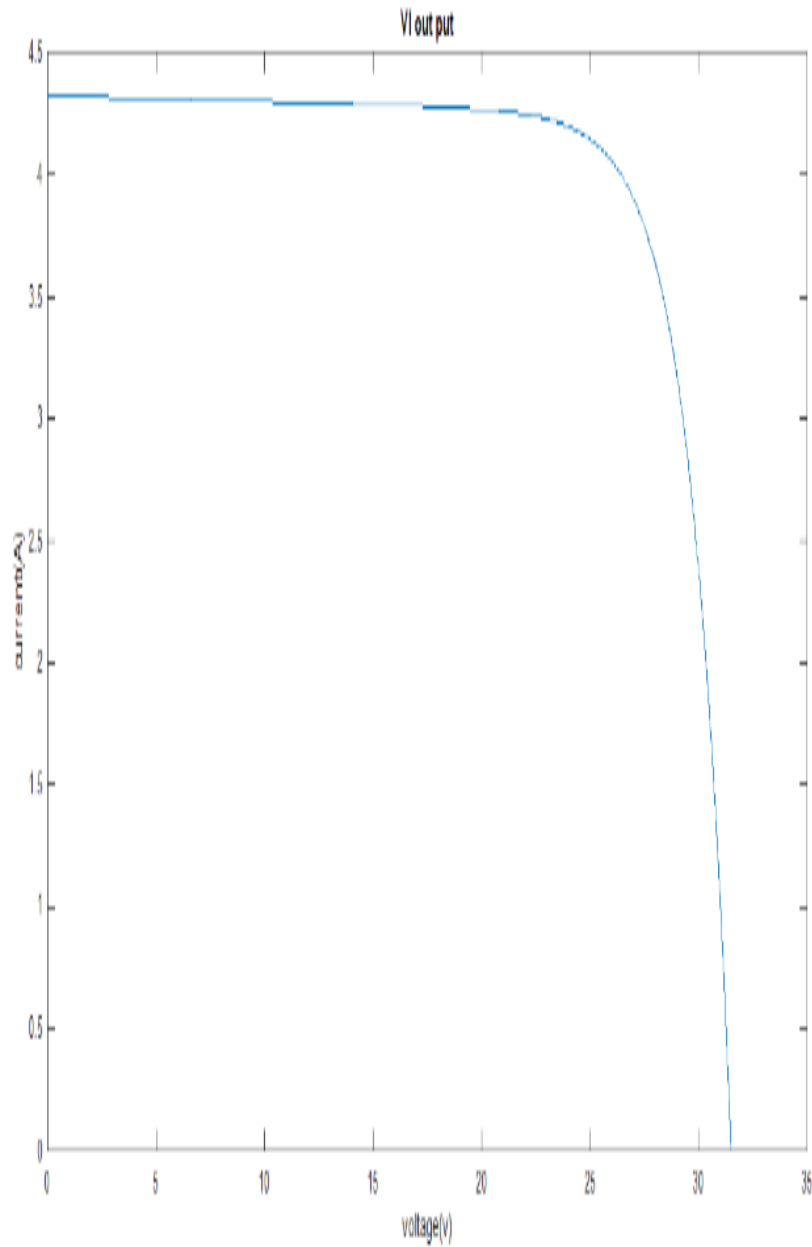

**b). V-I characteristics of PV**

The control algorithm for battery output is simulated on the same way as the coded algorithm for charging and discharging and also for charging operation.

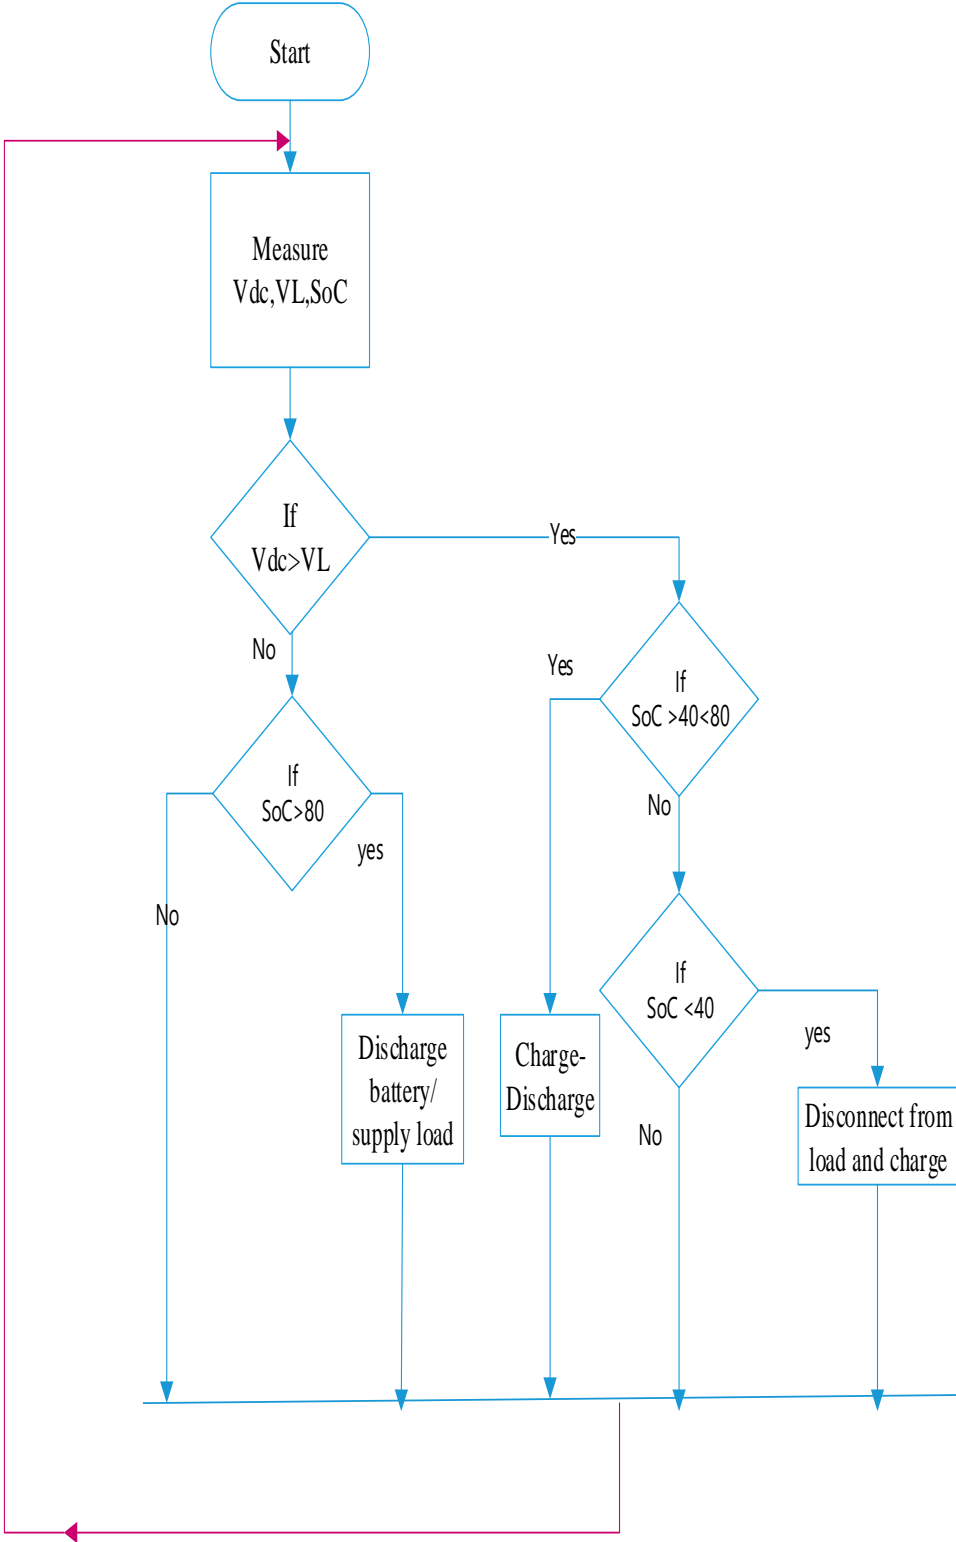


**Fig.11. Flowchart of battery management system.**




## Adaptive Droop Voltage Control on Parallel Connected Converters for DC Microgrid Systems

The Output voltage of the DC bus is sated at 51.95 for discharging of the battery energy case and 51.45 at charging of the battery. In general, the designed system and the control loop with algorithms are connected together to maintain the system updated in all cases. The system updates itself to deliver the load and battery management is done by the control system.

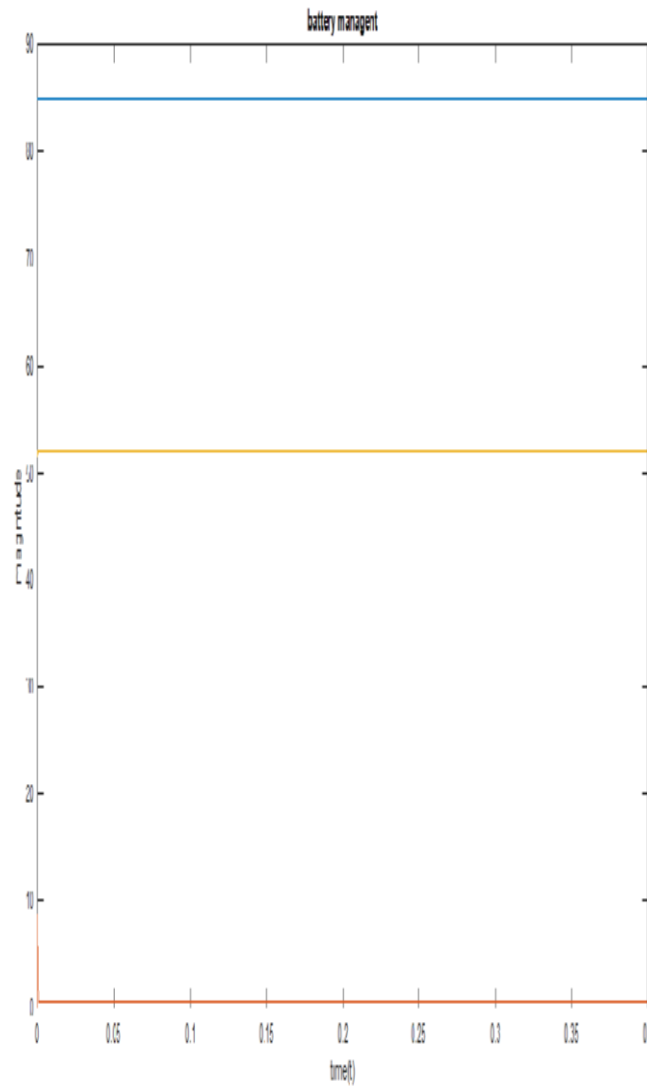

**Fig 12. Battery discharging (SoC, V and Ib) output**

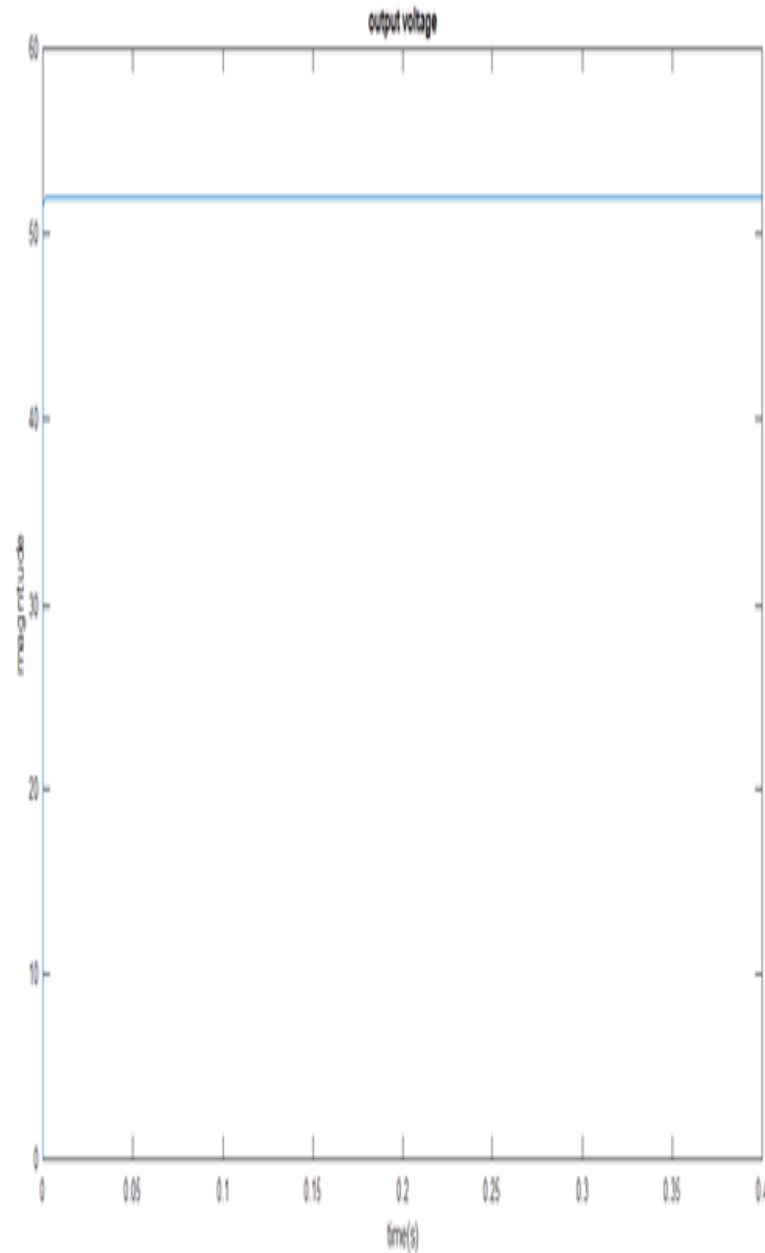

**Fig13. Output voltage of the load**

The  $R_{droop}$  values are  $0.2\Omega$  and its performance is analyzed in this way. The output voltage is constant at desired values in the system by using an algorithm, which is designed to improve the

system. The system efficiency and valuable design proves that the problem in micro grid operation during current sharing between loads and valuable results are achieved.

### **VIII. Conclusion**

The adaptive voltage droop control on parallel-connected converters is designed and simulated in this paper. The circulation of current in converters maintained by designing the droop control. The whole system is set to the required voltage and the designed algorithm is executed. The energy storage battery is used for backup purpose; the algorithm based on SoC and the system voltages also maintains the charge-discharge of the battery. The whole system performs in a designed way and results are satisfied

### **IX. Recommendations**

In this paper, adaptive droop voltage control on parallel connected converters of DC micro-grid systems is modeled and simulated for system using adaptive control algorithm. However, there is a wide scope of improving this project in area like: -Advanced model on current circulation between the systems are needed and this is continuous improving part of this topic to make zero as well as increasing capacity of power generation can be increased by adding a greater number of micro sources like diesel power generators. Using artificial neural network or Adaptive neuro fuzzy interface system (ANFIS) are one of the main improvements in control system.

### **References**

1. David J. Perreault, *Member, IEEE*, Robert L. Selders, Jr., and John G. Kassakian, "Frequency-Based Current-Sharing Techniques for Paralleled Power Converters"

IEEE TRANSACTIONS ON POWER ELECTRONICS, VOL. 13, NO. 4, JULY 1998.

2. Youichi It0 Yang Zhongqing and Hirofmi Akagi “DC Micro-grid Based Distribution Power Generation System” Mayway Labs Co., Ltd Yokohama 222-0033, Japan.
3. Brian T. Irving and Milan M. JovanoviC” Analysis, Design, and Performance Evaluation of Droop Current Sharing Method” Delta Products Corporation Power Electronics Laboratory, IEEE 2000.
4. Sijo Augustine, Student Member, IEEE, Mahesh K. Mishra, Senior Member, IEEE, N. Lakshminarasamma “Circulating Current Minimization and Current Sharing Control of Parallel Boost Converters Based on Droop Index” 2013 IEE.
5. Jung-Won Kim, Member, IEEE, Hang-Seok Choi, Student Member” A Novel Droop Method for Converter Parallel Operation” IEEE, and Bo Hyung Cho, Senior Member, IEEE
6. Zhongjing Ma, Wencai Jiang” An Adaptive Droop Voltage Control for DC Micro-grid Systems” School of Automation, Beijing Institute of Technology (BIT), and the National Key Laboratory of Complex System Intelligent Control and Decision (BIT), Beijing 100081, China.
7. Shiguo Luo ; Zhihong Ye ; Ray-Lee Lin ; F.C. Lee” A classification and evaluation of paralleling methods for power supply modules” 30th Annual IEEE Electronics Specialists Conference.

## **Adaptive Droop Voltage Control on Parallel Connected Converters for DC Microgrid Systems**

8. Shibo Wang; Song Zhang; Guangqian Ding; Chuanpu Li; Yan Cheng; Shumin Sun” Adaptive Control of Power Electronics Load Considering User Intention in Islanded Microgrid”2018 IEEE 4<sup>th</sup> southern power electronics conference.
9. Yuxiong Liu, Yang Han\*, Chengjia Lin, Ping Yang, Congling Wang” Design and Implementation of Droop Control Strategy for DC Microgrid Based on Multiple DC/DC Converters” School of Mechanical and Electrical Engineering University of Electronic Science and Technology of China (UESTC), Chengdu, China
10. Gustavo M.S. Azevedo; Fabricio Bradaschia; Marcelo C. Cavalcanti; Francisco A.S. Neves; Joan Rocabert; Pedro Rodriguez “Safe Transient Operation of Microgrids Based on Master-Slave Configuration”2011 IEEE Energy Conversion Congress and Exposition.

## **Bibliography**



**Mr. Pradeep Ramagiri** was born in Karimnagar District, Andhra Pradesh, on 16-07-1990. He completed his B.Tech. (EEE) in 2012, M. Tech. (Energy Systems) from JNTUHCEH, Telangana in 2016. He has 3.4 years of teaching experience and currently, working as Assistant Professor in Malla Reddy College of Engineering and Technology (Autonomous). He has 7 International and National papers published in various conferences and journals held in India. His research interests are Power Systems, Power Quality, Smart Grid, and Distributed Generation. He is a Member of MISTE



**Mr. Tilahun Kochito** was born in SNNPR, Ethiopia on 27-01-1991. He completed his B.Sc. Electrical and computer engineering (specialized in Power Engineering) from Hawassa University, Ethiopia in 2015 and M.Tech(Power Electronics Engineering) from JNTUHCEH, Telangana, India in 2020. He has 3 years of teaching, and 1 year of industry experience. currently, lecturer in Mizan-Tepi University, Ethiopia. He has published 3 journal papers and his research interests' areas are on micro-grid, Power electronics and electrical drive systems, Smart Grid and Distributed Generation.



**Dr. K. Rayudu** was born in East Godavari District, Andhra Pradesh, on 10 -11-1975. He completed his B.Tech. in Electrical and Electronics Engineering (EEE) from Jawaharlal Nehru Technological University (JNTU) College of Engineering, Kakinada in 1999, M.Tech.(IT in Power Engineering) from Jawaharlal Nehru Technological University (JNTU) College of Engineering, Hyderabad, Andhra Pradesh in 2004 and completed Ph.D.(Power Systems) from Jawaharlal Nehru Technological University College of Engineering, Hyderabad in 2018. He has 18 years of teaching experience. He has worked as Faculty (Teaching Assistant) at JNTU College of Engineering, Hyderabad and is presently working as Professor & Head, B V Raju Institute of Technology (BVRIT), Narsapur, Medak District. He has 5 International and National Journals to his credit. He has 13 International and National papers published in various conferences held at India. His research interests are Artificial Intelligence applications to Power Systems, Reactive Power Dispatch, Micro Grid and Distribute Generation.



**Dr. A. Jaya Laxmi**



**Dr. A. Jaya Laxmi** was born in Mahaboob Nagar District, Andhra Pradesh, on 07-11-1969. She completed her B.Tech. (EEE) from Osmania University College of Engineering, Hyderabad in 1991, M. Tech. (Power Systems) from REC Warangal, Andhra Pradesh in 1996 and completed Ph.D.(Power Quality) from Jawaharlal Nehru Technological University College of Engineering, Hyderabad in 2007. She has 5 years of Industrial experience and 21 years of teaching experience. She has worked as Visiting Faculty at Osmania University College of Engineering, Hyderabad and is presently working as Professor & Local Coordinator, GIAN, JNTUHCEH, Kukatpally, Hyderabad. She has 110 International and National Journals to her credit.

She has 120 International and National papers published in various conferences held at India and also abroad. Her research interests are Power Systems, Power Quality, Smart Grid and Distributed

Generation. She is a Senior Member of IEEE and Member of various societies like FIE, MIAO, MSSSI, MISTE, MIETE and MISC