

Position Estimation of Breathed Ship during Varying Tides Using WSN Localization Technique

K.M. Akhil¹, R. Rashmi²

Abstract

Wireless Sensor Network Localization is a crucial facet that has promoted a convincing exploration in research with academic society. WSN can be defined as the collection of small, low-cost sensors that broadcast themselves in offhand fashion and congregate environmental changes in its range. The reference nodes in the WSN transmit data into the base station and the base station grants these data to be used by the end user. Localization is the process of computing the location of the wireless gadgets in a network system which is a collection of a huge quantity of low-cost nodes and it is a vital component in determining the base of occurrence. The proposed approach describes a method that aids to monitor the movement of a breathed ship during the tidal variation. Sensor Node Localization in WSN is performed with RSSI, modified centroid and triangular methods. The experiments are done with the help of Cooja simulator and it outperforms all the conventional methodologies with the highest location accuracy in minimal steps.

Keywords: *Localization, received signal strength indicator, weighted centroid method, triangle, WSN.*

Introduction

Localization in WSN is broadly used for estimating the current location of the sensor nodes. The essential objective of WSN is to look at the measures of objective parameters within the position where it is put and to precisely appraise the question occasion, discovery of occasions and to sense the information [1]. The factors such as temperature, sound, level of emission, humidity, wind environmental conditions are quantified by WSNs. There are thousands of nodes placed in WSN and installation of GPS in each sink node is a tedious task

¹ Department of Computer Science, Amrita School of Arts and Sciences, Mysuru Campus, Amrita Vishwa Vidyapeetham, India, akhilkm@my.amrita.edu

² Department of Computer Science Amrita School of Arts and Sciences, Mysuru Campus, Amrita Vishwa Vidyapeetham, India, rashmirajesh2498@gmail.com

and GPS will not provide an explicit location in indoor environment. Also, in a complex WSN manually constructing the location relation on each sensor node is practically impossible. On the other hand, the GPS signals may get disrupted due to cellular network issues. This in turn effects the sink nodes in such a way that they cannot find the precise position without using the additional device. Localization of the sensor nodes is comprehensively analyzed over time and the research relies on miniature nodes called reference node in which the node is sentient to its current location. WSN can be used for monitoring as well as the management of substantial and physical environment factors. With the aid of hop-by-hop communication the collected data can be shared by calculating the various parameters [2]. Based on the application and prepare to assess the location the calculations can be categorized into distinctive areas. Range-free localization calculations can be utilized as a substitute for Range based localization strategies with persuaded accuracy. With the intention of diminish the overall fare of the network, anchor nodes which are aware of its position is installed in the GPS network. Depending upon the position of anchor/beacon nodes the other free nodes can predict its locations. It's vicinity of the nodes for the centroid format employments a grained localization calculation which identifies the area of each node by several reference node locations. The node gets the point of interest flag in its contact zone and absolutely gauges its facilitates as the landmark's centroid. Upon getting this information, the unidentified node can calculate its location. Range-free localization calculations which utilizes RSSI based location estimation can be classified based on the distributed scenarios. Although, depending on the environment, it has assured advantages and disadvantages. The advantage is that it does not include any impressive equipment which make it a light-weight procedure [3]. Upon receiving every signal packet, intensity of the signal can be determined, and by integrating the measured RSSI indicator strength can be shaped. At wider distances, the signal strength gets weakened and the wireless traffic speed becomes slow which results in low average throughput. The major consequence faces due to this is when an RSSI value is asserted in a negative sense, the closest the value is to zero, the greater the obtained signal. The four parameters of RSSI methods are dynamic range, precision, linearity and averaging time. The low and high energy of the receiver which is expressed in decibels (dB). The RSSI method surpasses other techniques with the advantage of its ease of use and with the aid of RSSI inexpensive, battery-powered nodes with minuscule reminiscence sizes and handling capacities can be implemented.

The normal passenger ship and carrier ships need to be anchored when they need to stop the ship. Anchor in the ship can either be provisional or stable. Provisional anchors are used for the production of the low-priced and are hardly moved. An expert facility is required to move or sustain them. Ships hold one or more provisional anchors, which may be of dissimilar design and weights. A sea anchor is a drag gadget, not get in touch with the seabed, which is used for minimizing the drift of a vessel comparative to the water. A sea anchor is a drag gadget used to guide a ship running before a storm in a following or overtaking sea or when passing a hurdle in the breaking sea. During low tide and high tide, the ships will be changing their position even the ship is breathed. The coastal guards are the ones who monitor the boat and ship travels along with their position each time. The sailors of ships need to know the presence of other ships and boats for the smooth travelling of their ships. The current method of locating ships is using satellite communication and GPS. When multipath error is caused by satellite signals from GPS reflects nearby bridges and other ships. Many path limits GPS signals and decreases the precision and consistency of ships position. Other factors disturb the positioning and precision is the visibility of the GPS satellite. Intervention restricts the exactness of the position which results in a failure of GPS positioning, near the starting place of interference [4].

For sensor node localization, a novel RSSI-based Weighted Centroid approach is proposed. WSN with six anchor nodes and a sensor node is used to measure the RSSI value and determine the weighted calculate. These six reference nodes are used to create seven combinations of four sets. After that, the seven combos are used for creating three anchor sets. Firstly is to separate inexactly. This is done with the help of RSSI estimation. Position will be calculated using the weighted figure and after that region is calculated within the moment step. We get the possible acknowledged cases after the area calculation. In order to obtain a precise position, the normal evaluated position is calculated and changed. Range-free executions have a few advantages such as counting moo taken a toll, moo communication activity, no additional equipment and versatile localization precision. Since of these recognizing characteristics, range free approaches has proposed as a conceivable arrangement to the WSN localization issue.

Related Works

The proposed work proposes an approach to maximize the power consumption which removes unwanted data loss and data transfer [5]. The proposed work utilize node's reliability to extend the network lifetime since sensors near to the sink, run out of vitality much more speedier than sensors completely different parts of the observed region which

cause restricted arrange lifetime and the energy consumption is balanced [6]. The proposed work uses RSSI of reference nodes by using GPS, calculates its measurement from the sensor and it works with efficiency of 95% accuracy level due to use of mathematical model [7]. The proposed work aimed at providing best techniques for sea localization to track objects was revised along with some further research to collect the data which could serve as a beginning phase for upcoming developments [8]. The proposed work addresses a target tracking approaches which utilizes a node may results in a power loss and produces heavy computation burden on the node while using more sensors gives best results in all other aspects [9]. The proposed work addresses a moo fetched and vitality productive activity checking framework basically appropriate for the developed region, involves Bluetooth modules and Zigbee transceiver to form WSN [10]. The proposed work presents the different techniques and mechanisms for WSN like centralized, distributed, K-means clustering algorithm, topology-based network etc. and found that distributed techniques support scalability, autonomous nodes and deployment and elimination of nodes [11]. The proposed work proposes an interferometric ranging technique to estimate the location of a sensor networks which gives exact measurements to locate malicious reference nodes that gives wrong location information to sensor nodes. So those unidentified nodes can choose who to trust [12]. The proposed work addresses a remote sensor holes location calculation which makes and identify and also calculates to make a difference steering convention to alter its transmission [13]. The propose work proposes a fault location system for WSN's with the viewpoints of control adequacy [14]. The proposed work introduces a closed form with minimum of five microphones in three dimensions and it is very quick and precision [15]. The proposed work presents a novel localization approach in WSN with spatial energetic RSSI filtering which abuse the advance of the sensor node within the stacking prepare to adjust other impact of the electromagnetic wave [16]. The proposed work proposes a Half breed DV-Hop calculation. It uses RSSI values to estimate the position of sensor nodes of the previous locality [17]. The proposed work develops a Wi-Fi RSSI smart phone inertial sensor algorithm to achieves higher precision level [18]. The proposed work uses RSSI, TOA and TDOA location dependent parameter from an ultra –wide band measurement campaign to evaluate the performance of the other techniques and to form localization [19]. The proposed work develops a technique to evaluate the co-ordinates of the MU that uses parameter estimation for localization to evaluate the average distance error [20]. The proposed work discusses the localization techniques for UNB iot systems by misusing GPS nodes to decide the location of nodes and achieves higher accuracy with the use of distance estimation for

nearby distance [21]. The proposed work presents the strategy to move forward the vigor of the TDOA estimation between the two receiver signal for genuine information to extend the genuine vigor of the TDOA, gauges indeed more by considering interior into psycho-acoustics [22]. The proposed work addresses the issue of localizing an obscure number of inactive sources radiating the obscure signals from TDOA estimation and addresses the issue of localizing different source from the electromagnetic signals [23]. The proposed work proposes a reference free TDOA source localization using the inactive sensor cluster which measures the TDOA of the source flag to a few spatially dispersed recipients to decide the source from the crossing point of the set of hyperbolic condition characterized by the TDOA gauges. [24].

Methodology

Within the proposed strategy we utilize the Weighted Centroid approach for gauging the area of sensor node. In WSN, this conveys six reference nodes, a sensor node and distinguish to gather the three-reference node. RSSI at that point decided utilizing these three reference nodes. Taking after it's value of every RSSI is decided to choose it's weighted calculation for a proportion of the person RSSI to add up to RSSI. Appraise it's area of entirety for weighted figure increased by x and y facilitate independently utilizing by taking the below equation,

$$X = \frac{(X_1 * Pr_1) + (X_2 * Pr_2) + (X_3 * Pr_3)}{Pr_1 + Pr_2 + Pr_3} \quad (1)$$

$$Y = \frac{(Y_1 * Pr_1) + (Y_2 * Pr_2) + (Y_3 * Pr_3)}{Pr_1 + Pr_2 + Pr_3} \quad (2)$$

Where, P_r stands for RSSI value, P_x represents x arrange esteem for primary anchor node, P_y represents y organize esteem for primary reference nodes and deciding to facilitate position, utilizing the condition (1) & (2), integrate the area by utilizing the value (69.45, 60.75) of set (3, 5, 6) like base esteem, calculate it's area by taking below condition (3),

$$\text{Area, } \Delta = \frac{1}{2} [(X_1 Y_2 - X_2 Y_1) + (X_2 Y_3 - X_3 Y_2) + (X_3 Y_1 - X_1 Y_3)] \quad (3)$$

Here, $X_1 X_2 X_3$ are the x coordinates, $Y_1 Y_2 Y_3$ are y facilitates for the three anchor nodes. Area Δ is measured utilizing condition (3) and $\Delta_1, \Delta_2, \Delta_3$ is measured at the same time. The esteem of Δ and $\Delta_1, \Delta_2, \Delta_3$ are compared to see if the two values are the same or not.

In the event that it is raised to the sensor node is inside the curved frame indicated by the three anchor or reference points, On the off chance that it isn't raised to the sensor node is a exterior the convex hull. On the off-chance that the position is inside its acknowledged, in the event that it is exterior it's rejected. At last determine the precision by taking the normal of the surmised location from all conceivable acknowledged cases. Figure 1 portrays the arranged work's flow.

The RSSI esteem for three anchor nodes encompassing the sensor node is calculated first, at that point weighted factor is computed and the location will be estimated. Check in the event that the locale is raised to or not after measuring it. Whether it isn't break even with it ought to be ended. In the event that it's break even with it ought to take the normal of the surmised area. At last compute the mistake and precision.

Algorithm

Start:

Step 1: Measurement of RSSI for the sensor node among three reference nodes around a ship.

Step 2: Measuring weights of every RSSIs, estimate weighted factor of ratio between individual RSSI and total RSSI.

Step 3: Find a location by sum of weighted factor by the product of x and y one by one.

Step 4: The area calculation for determining a location is within the bounds of coverage area defined by three reference points.

Step 5: For inside location, accept it else discard.

Step 6: Take the average of estimated location from all possible accepted cases.

Stop

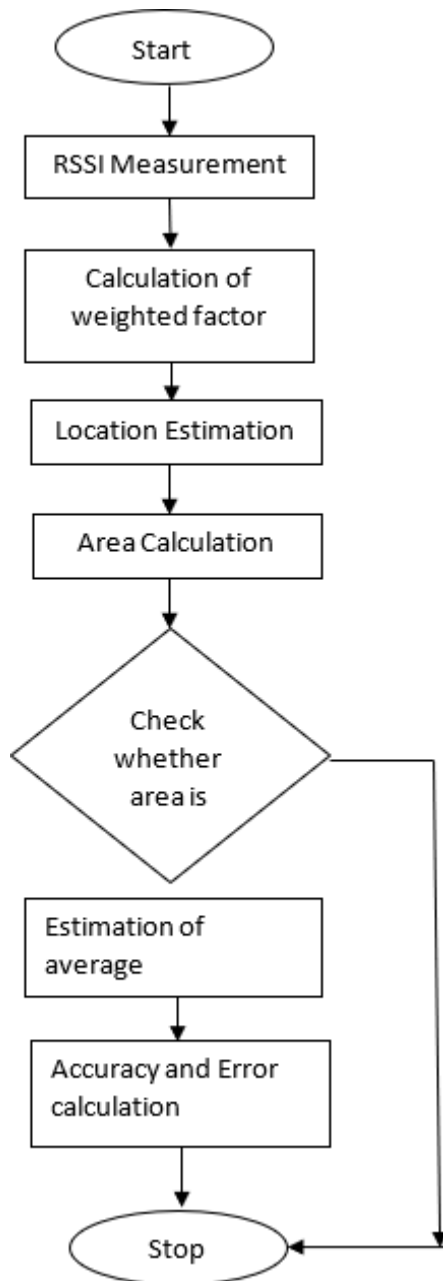


Fig. 1. Flowchart

Experiment and Implementation

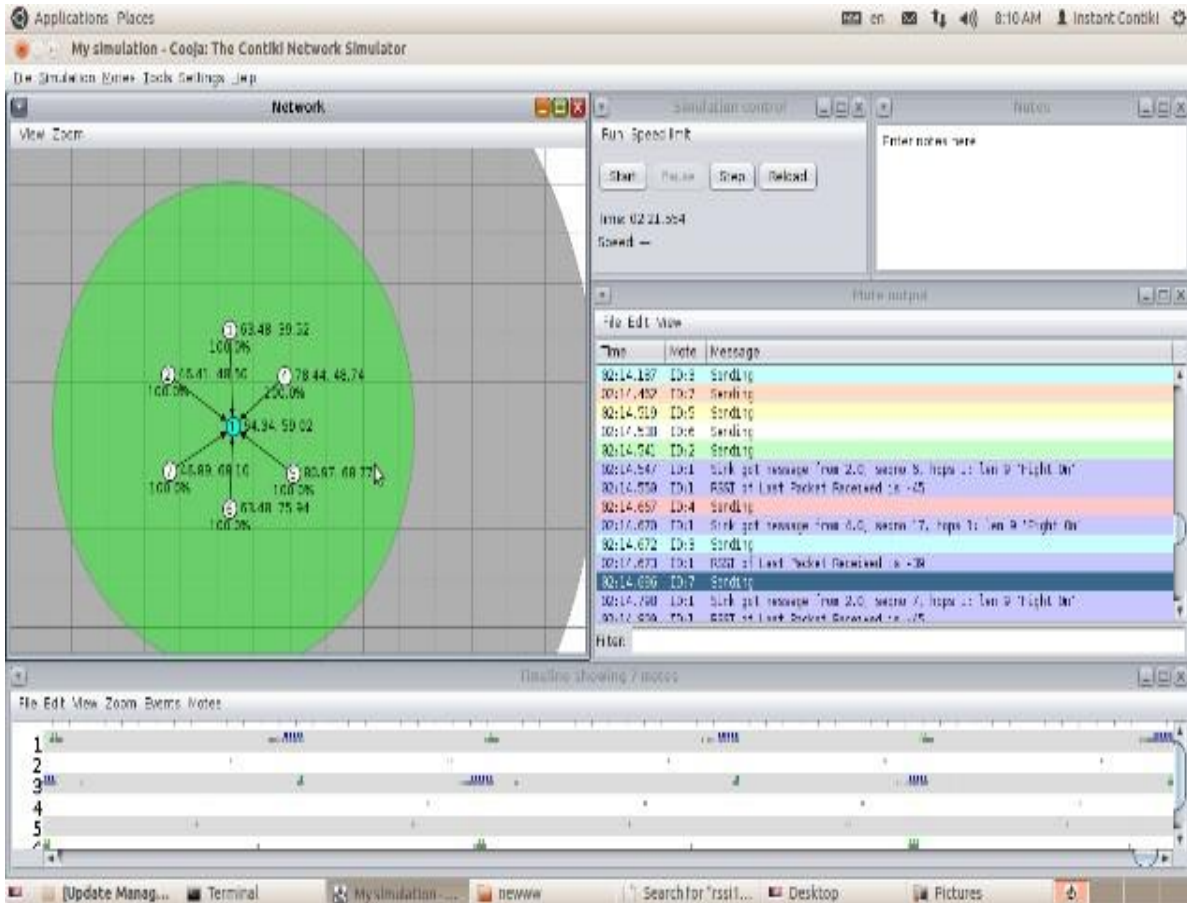


Fig. 2. Sensor node (ship) and Anchor nodes arrangement (around a ship)

Figure. 2 outlines the arranged work execution which is tired with Contiki-OS utilizing a test system COOJA. For WSN, it consists of six reference and a sensor nodes. RSSI value of it is reference nodes is decided in connection with sensor node. Taking after the RSSI calculation, reference nodes are gathered in seven combination of four nodes utilizing it's six reference nodes, seven conceivable varieties are tabulated. Unit Disk Graph Medium (UDGM) separate misfortune for engendering demonstrate utilized. This TX proportion is 100%, RX proportion is 100%, TX extended for 45 meters and INT expanded to 100 meters values mentioned within the Table 1 shows 1 scenario for the ship localization and the combinations of sensor node with reference node. The sensor node actual position is (64.34,59.02). There are four reference nodes with seven varieties enrolled, as well as the facilitate value, RSSI of it's possible combinations. Based on the six reference nodes, there are seven possible combinations (2,3,4,5), (3,4,5,6), (4,5,6,7), (2,5,6,7), (2,3,4,7), (3,4,6,7).

Table I

Anchor Nodes and their RSSI Combination

Real Sensor node	Ref_ Node 1	Ref_ Node 2	Ref_ Node 3	Ref_ Node 4
Arrangement	2	3	4	5

64.34,59.02	46.41,	63.48,	78.44,	80.97,
	48.5	39.52	48.74	68.77
	(-45)	(-43)	(-39)	(-42)
Arrangement	3	4	5	6
	63.48,	78.44,	80.97,	63.48,
	39.52	48.74	68.77	75.94
	(-43)	(-39)	(-42)	(-38)
Arrangement	4	5	6	7
	78.44,	80.97,	63.48,	46.89,
	48.74	68.77	75.94	68.10
	(-39)	(-42)	(-38)	(-43)
Arrangement	2	5	6	7
	46.41,	80.97,	63.48,	46.89,
	48.5	68.77	75.94	68.10
	(-45)	(-42)	(-38)	(-43)
Arrangement	2	3	6	7
	46.41,	63.48,	63.48,	46.89,
	48.5	39.52	75.94	68.10
	(-45)	(-43)	(-38)	(-43)
Arrangement	2	3	4	7
	46.41,	63.48,	78.44,	46.89,
	48.5	39.52	48.74	68.10
	(-45)	(-43)	(-39)	(-43)
Arrangement	3	4	6	7
	63.48,	78.44,	63.48,	46.89,
	39.52	48.74	75.94	68.10
	(-43)	(-39)	(-38)	(-43)

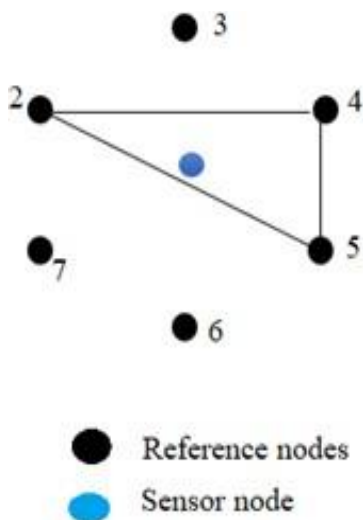


Fig. 3. Illustration of sensor and anchor node

Six reference nodes are encircled by sensor node in Figure 3. Reference nodes are represented by the dark dabs, while the sensor nodes are represented by the blue dots. The area of three reference nodes is calculated by taking from three reference nodes, for example

(2, 4, 5) by seven varieties created previously from six reference nodes and area is chosen for determining if the sensor node is inside otherwise exterior the arched body made via interfacing reference nodes.

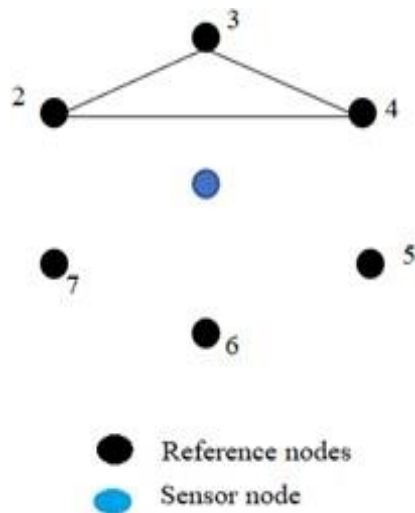


Fig. 4. Illustration of sensor and anchor nodes

From rejected case, sensor node is located exterior to the curved frame, Figure 4 depicts node structure. Consider set (2, 3, 4), use anchor node coordinates as follows: $X_1= 46.41$, $Y_1=48.5$, $X_2= 63.48$, $Y_2= 39.52$, $X_3= 78.44$, $Y_3= 48.74$,

$$\text{Area, } \Delta = \frac{1}{2} [(X_1 Y_2 - X_2 Y_1) + (X_2 Y_3 - X_3 Y_2) + (X_3 Y_1 - X_1 Y_3)]$$

$$\Delta = 1/2 [(46.41 * 39.52 - 63.48 * 48.5) + (63.48 * 48.74 - 78.44 * 39.52) + (78.44 * 48.5 - 46.41 * 48.74)]$$

$$\Delta = 145.86$$

$$\Delta_1= 208.09, \Delta_2=193.57, \Delta_3= 131.35$$

$$\text{Total area of the three reference nodes, } \Delta_1 + \Delta_2 + \Delta_3 = 533.01$$

If $\Delta \neq \Delta_1 + \Delta_2 + \Delta_3$ in set (2, 3, 4) is dismissed. For set (2, 3, 5) take the coordinates of anchor nodes as $X_1= 46.41$, $Y_1 = 48.5$, $X_2 = 63.48$, $Y_2 = 39.52$, $X_3 = 80.97$, $Y_3 = 68.77$,

$$\text{Area, } \Delta = \frac{1}{2} [(X_1 Y_2 - X_2 Y_1) + (X_2 Y_3 - X_3 Y_2) + (X_3 Y_1 - X_1 Y_3)]$$

$$\Delta = 1/2 [(46.41 * 39.52 - 63.48 * 48.5) + (63.48 * 68.77 - 80.97 * 39.52) + (80.97 * 48.5 - 46.41 * 68.77)]$$

$$\Delta = 328.18$$

$$\Delta_1 = \mathbf{208.09}, \Delta_2 = 21.65, \Delta_3 = \mathbf{98.42}$$

Total area of the three reference nodes, $\Delta_1 + \Delta_2 +$

$$\Delta_3 = 328.16$$

If $\Delta = \Delta_1 + \Delta_2 + \Delta_3$ in set (2, 3, 5), result is accepted.

Table II

An Estimated Location's Average

SI No.	Anchor sets	Initial Location	Modified location
1	2,3,5	69.45, 60.76	69.45, 60.76
2	3,4,6	69.45, 60.76	68.64, 58.04
3	3,5,6	68.64, 58.04	68.24, 56.68
4	3,4,6	68.24, 56.68	68.04, 56.00
5	4,5,7	68.04, 56.00	68.22, 57.09
6	4,6,7	68.22, 57.09	68.31, 57.63
7	4,6,7	68.31, 57.63	68.35, 57.90
8	3,4,6	68.35, 57.90	61.24, 56.30
9	3,5,6	61.24, 56.30	64.50, 55.30
10	4,5,7	64.50, 55.30	66.13, 55.10

Modified location for x and y

$$\text{Modified } x = \frac{\text{the base } x \text{ of triangle} + \text{Previous modified } x}{2}$$

$$\text{Modified } x = \frac{67.84 + 69.45}{2}$$

$$\text{Modified } x = \mathbf{68.64}$$

$$\text{Modified } y = \frac{\text{the base } y \text{ of triangle} + \text{Previous modified } y}{2}$$

$$\text{Modified } y = \frac{55.33 + 60.76}{2}$$

$$\text{Modified } y = \mathbf{58.04}$$

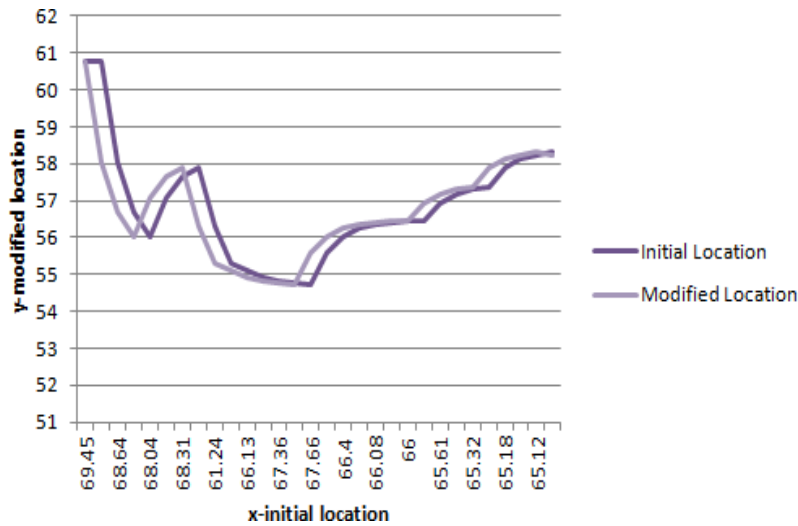


Fig. 5. Variations of Initial and Modified location

Table III.

Error and Accuracy Percentage

SI No.	Anchor sets	Error		Accuracy percentage	
		x	y	x	y
1	2,3,5	0.0790	0.0294	99.92	99.97
2	3,4,6	0.0668	0.0166	99.93	99.98
3	3,5,6	0.0606	0.0396	99.93	99.96
4	3,4,6	0.0575	0.0511	99.94	99.94
5	4,5,7	0.0603	0.0327	99.93	99.96
6	4,6,7	0.0617	0.0235	99.93	99.97
7	4,6,7	0.0623	0.0189	99.93	99.98
8	3,4,6	0.0481	0.0460	99.95	99.95
9	3,5,6	0.0025	0.0630	99.99	99.93
10	4,5,7	0.0278	0.0664	99.97	99.93

Conclusion

In WSN's, localization is broadly utilized to decide the show area of sink nodes. The centroid algorithm is a basic range-free localization algorithm that computes the spot of a node based on the positions for several anchor nodes. By transporting six reference nodes around the ship, we demonstrated a Weighted Centroid approach for sensor node localization. Within the measurement, the RSSI and a weighted figure are used. This investigation wiped out Contiki-OS utilizing built-in test system COOJA. The proposed method considers 10 scenarios where each scenario will have randomly selected set of 4 reference nodes and each set of 4 reference nodes are again divided into 4 sets of three reference nodes, then position of ship is calculated and area of three reference nodes will be calculated for each set of three reference nodes including a sensor node and total area of the three reference node is calculated by adding the

area of the three reference node then we calculate the area of the three reference nodes. In the event that, the area of the three reference nodes is break even with, When the sensor node is inside a curved frame indicated by three reference nodes. In the event that it does not rise to, the sensor node is located exterior of raised body. On it's off chance that exterior is rejected. At long last, exactness is computed by taking the normal of the surmised position from all conceivable acknowledged cases. The proposed method achieves 99.99% accuracy and the error rate varies from 0.01% to 0.07% because the proposed methodology is implemented in different scenarios and it will change as per the scenario. Sending this location information to other consoles like other ships is our potential future work.

References

1. K.M. Krishnapriya, S. Anand, and S. Sinha, "A customised approach for reducing energy consumption in wireless sensor network," *Int. J. Innov. Technol. Explor. Eng.*, 8(8), 1427–1431, 2019.
2. Y. Yang, M.I. Fonoage, and M. Cardei, "Improving network lifetime with mobile wireless sensor networks," *Comput. Commun.*, 33(4), 409–419, 2010.
3. doi:10.1016/j.comcom.2009.11.010.
4. P.C. Anusha, S. Anand, and S. Sinha, "RSSI- based localization system in wireless sensor network," *Int. J. Eng. Adv. Technol.*, vol. 8, no. 5, pp. 1765–1768, 2019.
5. S. Hamad, Y.H. Ali, and S.H. Shaker, "A Survey of Localization Systems in the Sea Based on New Categories," *J. Phys. Conf. Ser.*, vol. 1530, no. 1, 2020, doi: 10.1088/1742-6596/1530/1/012064.
6. J. Yoo and H. Jin Kim, "Target localization in wireless sensor networks using online semi- supervised support vector regression," *Sensors (Switzerland)*, 15(6), 12539–12559, 2015. doi: 10.3390/s150612539.
7. J. Lee, Z. Zhong, B. Du, S. Gutesa, and K. Kim. Low-cost and energy-saving wireless sensor network for real-time urban mobility monitoring system. *J. Sensors*, 2015.
8. doi:10.1155/2015/685786
9. M. Carlos-Mancilla, E. López-Mellado, and M. Siller. Wireless sensor networks formation: Approaches and techniques. *J. Sensors*, vol. 2016, 2016, doi: 10.1155/2016/2081902.
10. S. Kaur, "Node Localization for Wireless Sensor Networks," 5(10), 312–316, 2015.

11. S.M. Koriem and M.A. Bayoumi. Detecting and measuring holes in Wireless Sensor Network. *J. King Saud Univ. - Comput. Inf. Sci.*, 32(8), 909–916, 2020. doi:10.1016/j.jksuci.2018.08.001
12. Y. Zhang, N. Dragoni, and J. Wang, “A Framework and Classification for Fault Detection Approaches in Wireless Sensor Networks with an Energy Efficiency Perspective,” *Int. J. Distrib. Sens. Networks*, 2015, no. 1, 2015, doi: 10.1155/2015/678029
13. M.D. Gillette and H.F. Silverman, “A linear closed-form algorithm for source localization from time-differences of arrival,” *IEEE Signal Process. Lett.*, 15(1), 1–4, 2008.
14. doi:10.1109/LSP.2007.910324.
15. Wessels, X. Wang, R. Laur, and W. Lang, “Dynamic indoor localization using multilateration with RSSI in wireless sensor networks for transport logistics,” *Procedia Eng.*, 5, 220–223, 2010. doi: 10.1016/j.proeng.2010.09.087
16. O. Cheikhrouhou, G.M. Bhatti, and R. Alroobaea, “A hybrid DV-hop algorithm using RSSI for localization in large-scale wireless sensor networks,” *Sensors (Switzerland)*, 18(5), 1–14, 2018. doi: 10.3390/s18051469
17. W.W.L. Li, R.A. Iltis, and M.Z. Win. A smartphone localization algorithm using RSSI and inertial sensor measurement fusion. *GLOBECOM - IEEE Glob. Telecommun. Conf.*, 3335–3340, 2013. doi: 10.1109/GLOCOM.2013.6831587
18. Institute of Electrical and Electronics Engineers. and Technische Universität Wien., “Wireless Conference 2011 - Sustainable Wireless Technologies (European Wireless), 11th [i.e. 17th] European: date, 27-29 April 2011.” 626–630, 2011.
19. H.H. Cho, R.H. Lee, and J.G. Park, “Adaptive parameter estimation method for wireless localization using RSSI measurements,” *J. Electr. Eng. Technol.*, 6(6), 883–887, 2011, doi: 10.5370/JEET.2011.6.6.883.
20. H. Sallouha, A. Chiumento, and S. Pollin, “Localization in long-range ultra narrow band IoT networks using RSSI,” *IEEE Int. Conf. Commun.*, 2017.
21. doi: 10.1109/ICC.2017.7997195

22. D. Bechler and K. Kroschel, "Confidence Scoring of Time Difference of Arrival Estimation for Speaker Localization with Microphone Arrays," *Proc., 13. Konf. Elektron. Sprachsignalverarbeitung {(ESSV)}*, 2002.
23. F. Meyer, A. Tesei, and M.Z. Win. Localization of multiple sources using time-difference of arrival measurements. *ICASSP, IEEE Int. Conf. Acoust. Speech Signal Process. - Proc.*, no. 2017, 3151–3155, 2017, doi: 10.1109/ICASSP.2017.7952737.
24. Amar and G. Leus. A reference-free time difference of arrival source localization using a passive sensor array. *2010 IEEE Sens. Array Multichannel Signal Process. Work. SAM 2010*, 157–160, 2010, doi: 10.1109/SAM.2010.5606725
25. K.M. Akhil and S. Sinha. Self-Localization in Large Scale Wireless Sensor Network Using Machine Learning. *2020 International Conference on Emerging Trends in Information Technology and Engineering (ic0-ETITE)*, 2020, 1-5, doi: 10.1109/ic-ETITE47903.2020.339
26. V, Rohith & Prajitha, T.V. & Suresh, Sweetey. (2018). EEG Signal Analyzing and Simulation Under Computerized Technological Support. *International Journal of Engineering and Technology (UAE)*, 7, 38- 41. 10.14419/ijet.v7i3.8.15215
27. Mukhopadhyay, A. Anoop, S. Manishankar and S. Harshitha. Network Performance Testing: A Multi Scenario Contemplate. *2020 International Conference on Emerging Trends in Information Technology and Engineering (ic-ETITE)*, 2020, 1-7. doi:10.1109/ic-ETITE47903.2020.164
28. S. Kumar B.J., A. Nair and R. Raj V.K. Hybridization of RSA and AES algorithms for authentication and confidentiality of medical images. *2017 International Conference on Communication and Signal Processing (ICCSP)*, 2017, 1057-1060. doi:10.1109/ICCSP.2017.8286536