### Enhancing Heat-Electrical transfer properties of Polyvinyl Glycol Using Carbon Nanotube

Turkish Online Journal of Qualitative Inquiry (TOJQI) Volume 12, Issue 4, July, 2021: 1971-1980 Research Article

# Enhancing Heat-Electrical transfer properties of Polyvinyl Glycol Using Carbon Nanotube

Meena Kumari<sup>\*1</sup>, kulvinder Singh<sup>\*2</sup>, Sunil Chaudhary<sup>\*3</sup>, Kusum Rani<sup>\*4</sup>, Nidhi<sup>\*5</sup>

<sup>1</sup>Meena Kumari Research Scholar, Department of Physics BMN University Asthal Bohar, Rohtak Haryana,India.MeenaKadian8@gmail.com.

<sup>2</sup>Kulvinder Singh Asso ]oh9ciate Professor Department of Physics Deen Dayal Upadhyaya College University of Delhi, Delhi. India. kulvinder@ddu.du.ac.in

<sup>3</sup>Sunil Chaudhary Head, Department of Physics BMN University Asthal Bohar, Rohtak Haryana, India. sunilkc2001in@yahoo.com

<sup>4</sup>Kusum Rani Research Scholar, Department of Physics BMN University Asthal Bohar, Rohtak Haryana,India.Vatskusum6@gmail.com

<sup>5</sup>Nidhi Research Scholar, Department of Physics BMN University Asthal Bohar, Rohtak Haryana,India.Nidhimalik668@gmail.com

#### Abstract

Carbon nanotubes (CNTs) suspended in polyvinyl glycol were synthesized and their thermal or electrical conductivity enhancement rate were investigated. Polyvinyl alcohols/CNT based nan fluids have been synthesized by dispersing nan composites of Polyvinyl alcohol/CNT in distilled water without any surfactant. The results showed that well-dispersed Polyvinyl alcohols/CNTs nan fluids with varying concentration of Polyvinyl alcohol/CNT can be synthesized using the present method. The effective thermal and electrical conductivity of CNT/water and polyvinyl alcohol is measured with different concentration and temperatures (30–50 °C). Dispersed CNT was found to enhance thermal and electrical conductivities of base liquid. However the ratios of thermal conductivity show appreciable variations. Polyvinyl alcohol based coolants were found to show high thermal and electrical and thermal conductivities were explained on the bases of molecular interactions between constituent materials. The proposed explanation agree quite well with the experimental data.

**Keywords:** Carbon nanotubes, nan fluids, Polyvinyl alcohol, Stability, thermal and electrical conductivities enhanced

### Introduction

Continuous technological development in automobile industries has increased the demand for high-efficiency engines. The efficiency of engine depends on its better fuel economy and less emission. Conventional heat transfer fluid used as water and ethylene glycol cooling fluids in heat engine ,and have relatively poor heat transfer performance. Other method for increasing heat transfer in engine uses nan fluids [1]. The nanofluids were found to exhibit more stable and higher thermal conductivity. Nanotubes (CNTs) have drawn worldwide attention since its discovery in 1991. CNTs are excellent nanoparticles for preparing nanofluids because they have superior thermal conductivity (750–6600 W/m K)[2]. Nan fluids, as a new technology are obtained by dispersing nanoparticles on the base fluid. In the present study, nanoparticles were used in a mixture of distilled water, polyvinyl alcohol as a base fluid. Then thermal performance of a heat engine was studied. The experiment was performed for different volumetric concentrations of nanofluids of different flow rates and inlet temperatures (30-50°C). The result showed that superior increment of thermal and electrical conductivity. We use a PVA (poly vinyl alcohol) is a semi crystalline synthetic polymer. PVA is a creamy or whitish and nontoxic polymer [3]. It is tasteless, odorless and biodegrable in fluid [4]. Its physical and chemical properties make very versatile material for modern technology. Its good water-solubility, high tensile strength and elasticity, as well as good dispersing power makes it a useful polymer.


In this paper, PVA polymer is selected due to its amazing properties and a variety of other application. PVA can be used as good thermal stability enhancer material.PVA is an environmentally safe product, inexpensive and has good mechanical and optical properties also [5]. In present paper we study thermal and electrical conductivity mechanisms in CNT-based Polyvinyl alcohol. The PVA-CNT and distilled water were used for preparing samples. The sample was prepared by solution mixing method using ulrasonicator. We found that its electrical and thermal conductivity is increased as compared to base fluid.

## **Experimental Methodology**

(1) Preparation of PVA-CNTs Nanocomposites


The PVA-CNT Nanocomposites were prepared by solution mixing method using an ultrasonicator .The nanocomposites samples have been prepared by the following procedure:

A known weight (15gm) of PVA dissolved in 100ml distilled water. After that 0.2g CNT is dissolved in the sample by using ultrasonicator for 15 minutes at the room temperature (27<sup>0</sup>C Fig.1). After that mixture was filtered using filter paper (Whatman Filter Paper No 0). The prepared fluid was used as base material for preparation of other fluid with different concentration. We measured the thermal and electrical conductivity of the samples using inhouse build liquid thermal conductivity meters. (Fig.2). Solution of PVA,CNT in water and black in colour.

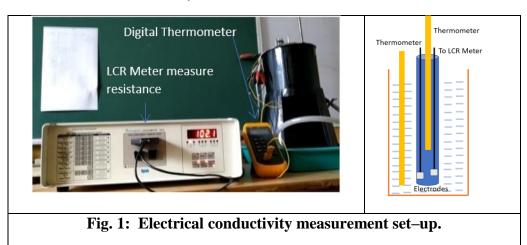

2. Method for electrical conductivity measurement:

The raw material used in present paper was as a fine powder of a commercially available polyvinyl alcohols .PVA is a polymer with a carbon chain backbone with hydroxyl group attached to a methane carbons. These hydroxyl groups can be a source of hydrogen bonding and responsible for the formation of polymer. We use this PVA (15g) dissolved with 100ml distilled water. After that 0.2g CNT dispersed in this sample. The powder were completely dissolved by using ultrasonicator for 15 minutes. For measuring electrical conductivity we used a LCR bridge. We take this sample in test tube having electrodes. Electrodes were attached to the LCR meter for the measurement of electrical resistance. Also, connections are made for the digital thermometer to measure the temperature of the fluid. This test tube is also kept in water bath for variation of temperature. The water is heated by a heating element. This increment of temperature is measured by digital thermometer. LCR meter measures the values of resistance and digital thermometer measures the value of temperature. The temperature was changed in the range of 30-50°C. We found that the increment of temperature decrease the electric resistance .The increase the electrical conductivity is attributed to the increase in concentration of CNT. It is clear that the temperature increase then electrical conductivity is increases.

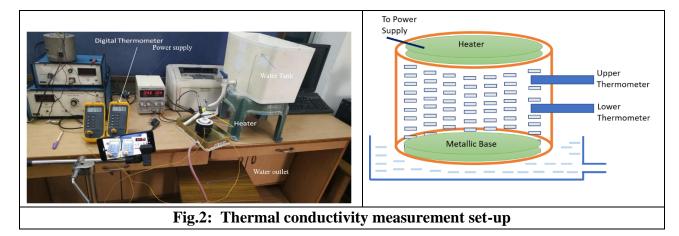

### 3. Method for the Thermal Conductivity Measurement

### Meena Kumari, kulvinder Singh, Sunil Chaudhary, Kusum Rani, Nidhi

Thermal conductivity of liquid is measured by layer method. Digital thermometers of sensitivity is 0.01°C for used to measure temperature of a section of a liquid kept in a container made of Teflon 4.7cm diameter and length 0.94 cm. Heating is done by an electrical metallic heater. Heating is done from top to bottom to minimize convection current. To ensure the unidirection heat flow the bottom of the chamber was filled with cooled running water. The temperature difference at two different levels was measured using two separate thermometer. The variation of temperature difference depends on the state is reached. The temperature difference depends on the state is reached. The temperature difference depends on the thermal conductivity of liquid. Temperature difference were recorded for various concentrations and compared to find the relative increament of thermal conductivity.

TABLE: 1 PROPERTIES OF CNT, WATER AND PREPARED COOLANT			
	CARBON		
PROPERTY	NANOTUBES	WATER	PVA+CNT+WATER(measured)
THERMAL			
CONDUCTIVITY	>3000W/mK	0.605W/mK	0.98377 W/mK
ELECTRICAL			
CONDUCTIVITY	10 <sup>6</sup> s/m	$5.0 \text{ x} 10^{-6} \text{ s/m}$	866.32 x10 <sup>-6</sup> s/m

Table 1 : knows values of thermal and electrical conductivities of CNT, water, and prepared coolants. CNT has high thermal and electrical conductivity .When mixed with water +PVA +CNT it enhances the electrical and thermal conductivities of the prepared coolant.

## **Experimental Result**

To have a stable solution of CNT in distilled water, the surfactant has to be used with it. In the present study, organic surfactants like PVA were used in the water –CNT system various compositions of the solution with carbon multi-walled carbon nanotubes and were subjected to thermal and electrical conductivity study. The present study is on the thermal and electrical properties of various proportions of coolant, water, and CNT. In this study concentration of CNT is ranged between1.16g/L to 1.90g/L. The behavior of electrical and thermal conductivity show by graphical representation for the different concentration of 1.16g/L, 1.54g/L and 1.90g/L. We measure the temperature difference and time of the prepared sample using the apparatus set-up in Fig.3.

Thermal conductivity is given as:

$$K = \frac{Q\ell}{tA(T_2 - T_1)} \tag{1}$$

The raw materials used in this wo

r commercial polyvinyl alcohol (P V chloride (CoCl 2 ) salt with weight percentages (0, 1, 3, 5, 7 and10 wt %). The films were prepared using the conventional casting method by dissolving the powders with the appropriate percentages in distilled water. The powders were completely dissolved by using magnetic stirrer for about 1hour and then placed in Petri dish (5 cm diameter). The thic kness of the dried samples was found to be ~ 0.045 cm micrometer. The method of the three method of Teflon-isolated circular electrodes) was used according to ASTM D66-257 recommendations effect of additives and temperature on the volumetric conductivity of polymeric systems. The input electrical power was regulated by using a (D.C.) power supply of Phillip Harris Limited type having a voltage of (3 voltage used in this study was (1000) V. The current was measured by a Digital Solid State Electrometer (616) with

sensitivity of (10

-15

) and full gradation. The temperature was

changed in the range of (303-

373) K by using an electrical

oven of Yamato (DP61)

Here Q is heat flow in time t across length l through the area of cross-section A. Heat flow is Q=VIt. Here V is the supply voltage I is current to the heater. Let  $K_s$  and  $K_{st}$  are thermal conductivities of sample and standard liquids,  $|(T_2 - T_1)|_s$  and  $|(T_2 - T_1)|_{st}$  are temperature difference between to heaters for a sample and standard liquid respectively at the steady-state. If dimensional parameters are kept constant the ratio of thermal conductivities are given as:


From the above relation, the thermal conductivity of the sample fluid is determined. Similarly, measurements for electrical conductivity of sample liquid are done by measuring the electrical resistance at a given temperature of the prepared sample. This is done using the apparatus set-up in Fig.3. Comparing ratios of their respective electrical resistances ,the electrical conductivity of the prepared sample is measured with the standard sample (Double distilled water at room temperature). At this concentration, we have drawn the graph for thermal and electrical conductivity [Fig.3 and 4]. Out of various compositions, organic surfactant PVA shows extraordinary performance.

### **RESULTS AND DISCUSSIONS**

To have a stable solution of CNT in distilled water, surfactant has to be used with it .In the present study organic surfactant like Poly Vinyl Alcohol were used in the water-CNT system various compositions of the solution with carbon multi-walled carbon nanotubes were subjected to thermal and electrical conductivity study.


The present study is on thermal and electrical conductivities of various proportions of coolant ,water and CNT .The behavior of electrical and thermal conductivity show by graphical representation

### Enhancing Heat-Electrical transfer properties of Polyvinyl Glycol Using Carbon Nanotube

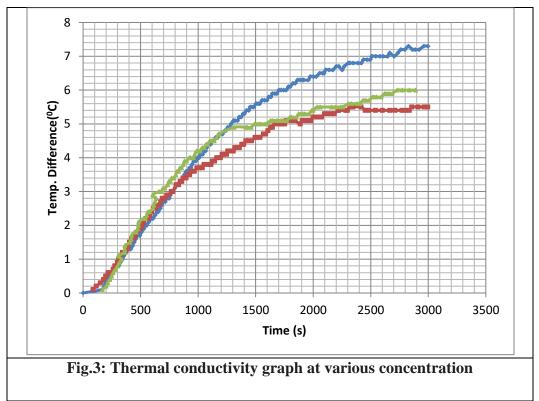

From fig.3 shows that the good thermal behavior at different concentration of cnt. In this fig.red line shows best conductivity at different temperature difference. The high thermal conductivity of the polymer blends can be attributed to comparatively strong hydrogen bonds with cnt. CNT participate in the formation of bonds with-OH groups in the side chains of PVA. In this study, the reduction of hydrogen bonds by the disturbance of cnt was observed in the fig., judging from

slightly peak position decrease of the –OH group band in the fig.3.[7]

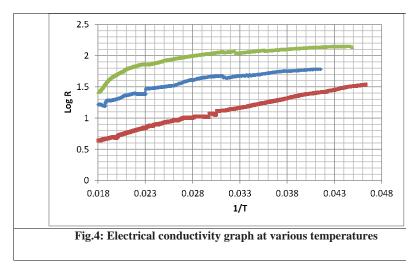

From the Fig.4 shows that electrical conductivity increases due to the addition of CNT in PVA matrix.[8].This is due to the multiwalled CNT coordinated through ionic bonds with hydroxyl

group belonging to the different chains in PVA. This reduces the intermolecular interaction between the PVA molecules and increases the required volume for ionic carriers to drift in the polymer matrix. This enhances the electrical conductivity increases.[9]

### RESULT

The result showed that the conductivity increases with an increase in PVA concentration throughout the sample due to the larger number of charge carriers in polymer electrolyte system. It was found that the conductivity also increases with temperature up to  $50^{\circ}$ C.When temperature increases, the increases vibration of molecules and increase the space between them which causes free ions receiving the thermal energy and increases the kinetic energy for their movement.[10]

The thermal conductivity of each sample was calculated with temperature difference value. The thermal conductivities of PVA/CNT nanofluid composites with different wt% of MWCNT-PVA are shown in fig.4. The thermal conductivity of the nanofluid composite at different concentration of CNT are1.90g/L,1.54g/L and 1.16g/L were 0.66643W/mK, 0.98377 W/mK and 0.8526W/mK respectively. The increase in conductivity was more pronounced at concentration of CNT 1.54g/L.

The electrical conductivity of each sample was calculated with the resistance value . The electrical conductivities of PVA/CNT nanofluid composites with different wt% of MWCNT-PVA are shown in Figure 5. The MWCNT-PVA affected the nanofluid composites. The conductivity increases with increasing amounts of MWCNT incorporated into PVA. The conductivities of the nanofluid composite at different concentration of CNT are1.90g/L,1.54g/L and 1.16g/L were  $468.10 \times 10-6$ ,  $866.32 \times 10-6$  and  $315.61 \times 10-6$  S/m respectively. The increase in conductivity was more pronounced at concentration of CNT 1.54g/L. [11].

### Conclusion

We have successfully modified the PVA composite by adding CNTs. It was found that, with respect to concentrations CNT reinforced PVA composite showed the highest performance in thermal and electrical properties. The thermal and electrical properties have been drastically improved due to CNT content in the nanofluid.[12]

By obtaining results and comparison the conclusion has been done

\*Cooling capacity increase with an increase in inlet coolant temperature.

\*Cooling capacity using nanofluid is much higher than using base fluid. \*Thermal conductivity is increase as compared to the base fluid.

\*Electrical conductivity is increase as compared to the base fluid.

\*Both thermal and electrical conductivity show the optimization at a particular concentration.

# Enhancing Heat-Electrical transfer properties of Polyvinyl Glycol Using Carbon Nanotube

\*Fig 4 and Fig 5 shows extraordinary performance of electrical and thermal conductivity. Fig 4 shows the good thermal conductivity at higher temp. Fig 5 shows the performance of electrical conductivity at 50°C.

### References

- Jiang, H., Zhang, Q., & Shi, L. (2015). Effective thermal conductivity of carbon nanotubebased nanofluid. Journal Of The Taiwan Institute Of Chemical Engineers, 55, 76-81. doi: 10.1016/j.jtice.2015.03.
- Heris, S., Shokrgozar, M., Poorpharhang, S., Shanbedi, M., & Noie, S. (2014). Experimental Study of Heat Transfer of a Car Radiator with CuO/Ethylene Glycol-Water as a Coolant. Journal Of Dispersion Science And Technology, 35(5), 677-684. doi: 10.1080/01932691.2013.805301
- 3. <u>Muhammad Aslam</u>, <u>Mazhar Ali Kalyar</u>, & <u>Zulfiqar Ali Raza</u>(2018). Polyvinyl alcohol: A review of research status and use of polyvinyl alcohol based nanocomposites. <u>https://doi.org/10.1002/pen.24855</u>
- 4. Kurbanoglu, S., & Ozkan, S. (2018). Electrochemical carbon based nanosensors: A promising tool in pharmaceutical and biomedical analysis. Journal Of Pharmaceutical And Biomedical Analysis, 147, 439-457. doi: 10.1016/j.jpba.2017.06.062
- <u>Khdejah S Hajeeassa <sup>1</sup></u>, <u>Mahmoud A Hussein <sup>12</sup></u>, <u>Yasir Anwar <sup>3</sup></u>, <u>Nada Y Tashkandi <sup>1</sup></u>, <u>Zahra M Al-Amshany <sup>1</sup></u> (2018). Nanocomposites containing polyvinyl alcohol and reinforced carbonbased nanofiller: A super effective biologically active material. DOI: <u>10.1177/1849543518794818</u>
- 6. Sabah Anwer Salman, Zainab Al-Ramadhan', Nabeel A. Bakr, Zainab F. Nazal's(2014). ELECTRICAL PROPERTIES OF POLYVINYL ALCOHOL (PVA) FILMS DOPED WITH CoCl2 SALT. t: <u>https://www.researchgate.net/publication/269392884</u>
- Yeongcheol Park<sup>1</sup>, Myungil You<sup>12</sup>, Jihoon Shin<sup>34</sup>, Sumin Ha<sup>5</sup>, Dukeun Kim<sup>6</sup>, Min Haeng Heo<sup>34</sup>, Junghyo Nah<sup>7</sup>, Yoong Ahm Kim<sup>8</sup>, Jae Hun Seol<sup>9</sup>. <sup>(2019)</sup>Thermal conductivity enhancement in electrospun poly(vinyl alcohol) and poly(vinyl alcohol)/cellulose nanocrystal composite nanofibers. ;9(1):3026. doi: 10.1038/s41598-019-39825-8.
- 8. <u>Polyvinylalcohol industrial use only</u> Kuraray acquires Clariant's polyvinyl alcohol and butyral businesses. (2001). Additives For Polymers, 2001(8), 3. doi: 10.1016/s0306-3747(01)801799.
- Vijaya Kumar G \*1 (2017) ENHANCEMENT OF ELECTRICAL CONDUCTIVITY IN POLYVINYL ALCOHOL FILMS BY DOPING WITH Nd3+ IONS. \*1 Department of Physics, Maharani's Science College for women, Palace Road, Bangalore560001, India DOI: <u>https://doi.org/10.5281/zenodo.803434</u>.
- 10. <u>Abdulameer Khalaf Arata</u>, <u>Dalal Hassan Abdulkadhimb</u>, <u>Maher Hasan Rashida</u> (2018) . StudyofElectricalPropertiesofPoly(VinylAlcohol)/Alumina (PVA/Al2O3)Nanocomposite
- 11. Journal of University of Babylon Volume 26, Issue 6, Pages 95-100.

- 12. Mohd Faiz Muaz Ahmad Zamri, Sharif Hussein Sharif Zein\*, Ahmad Zuhari Abdullah and Nor Irwin Basir. Improved Electrical Conductivity of Polyvinyl Alcohol/ Multiwalled Carbon Nanotube Nanofibre Composite Films with MnO2 as Filler Synthesised using the Electrospinning Process. School of Chemical Engineering, Engineering Campus, Universiti Sains Malaysia, 14300 Nibong Tebal, Penang, Malaysia. Inernational Journal of Engineering & Technology IJET-IJENS Vol: 11 No: 06
- Monirul Hasan 1, Sujan Kumar Das2,\*, Jahid M. M. Islam3, Md. Abdul Gafur4, Enamul Hoque5, Mubarak A. Khan3.(2013) Thermal Properties of Carbon Nanotube (CNT) Reinforced Polyvinyl Alcohol (PVA) Composites. International Letters of Chemistry, Physics and Astronomy. ISSN 2299-3843. 12, 59-66
- 14. Improved Electrical Conductivity of Polyvinyl Alcohol/ Multiwalled Carbon Nanotube Nanofibre Composite Films with MnO2 as Filler Synthesised using the Electrospinning Process Mohd Faiz Muaz Ahmad Zamri, Sharif Hussein Sharif Zein\*, Ahmad Zuhari Abdullah and Nor Irwin Basir School of Chemical Engineering, Engineering Campus, Universiti Sains Malaysia, 14300 Nibong Tebal, Penang, Malaysia
- 15. this paper for representing graph Study of Electrical Properties of Poly (Vinyl Alcohol)/ Alumina (PVA/Al2O3)Nanocomposites Abdulameer Khalaf Arata , Dalal Hassan Abdulkadhimb , Maher Hasan Rashida aCollege of basic education ,department of sciencephysics, University of Babylon, Babylon, Iraq bCollege of Education pure of science, Department of physics, University of Babylon, Babylon, Iraq <u>Abd\_al015@yahoo.com</u>