

## **Investigation of the Exhaust Discharger System to Reduce Backpressure on the Single Cylinder C. I. Engine.**

**Manish S Deshmukh<sup>1\*</sup>, Atul Patil<sup>2</sup>, Dheeraj S Deshmukh<sup>3</sup>**

Associate Professor, Mechanical Engineering, AISSMS College of Engineering, Pune, MS, India.

<sup>2</sup> Associate Professor, Mechanical Engineering, Dr. D.Y. Patil Institute of Technology, Pimpri, Pune, MS, India

<sup>3</sup> Associate Professor, Mechanical Engineering, G. H. Rasoni College of Engineering, Nagpur, MS, India

Corresponding Author Email: msdngp13@gmail.com

### **ABSTRACT**

In the internal ignition engine, the exhaust structure assumes a fundamental job was improving burning proficiency. Energy productive gas structure improvement requires the least fuel utilization and most excessive gas energy to decrease gas emanations and successful waste energy recuperation components. To find the gas parameters accessible at various engine working conditions and to develop a gas structure for the most extreme use of available energy at the gases of the engine chamber is considered. Every gadget's structure should offer the least decrease in pressure over the setup, but it should not have confrontational impact on the operation of the diesel engine. Back-pressure directly impacts on per cycle operation of the engine. To limit the tapping work, backpressure must be low as could reasonably be expected. The backpressure is legitimately corresponding to the gas discharger structure plan. The state of the delta cone of gases discharger structure changes the backpressure. This expansion in return pressure causes more fuel consumption. Expanded pressure change finding is value addition. In the inside ignition engine, the exhaust structure assumes an indispensable job in improving the burning productivity. Decent molded gas structures increment the presentation of the engine. The work has been centered on diminishing the backpressure in the gas structure by new gases facility to expand the ignition effectiveness utilizing exploratory investigation and Computational fluid dynamic examination..

**Keywords:** Backpressure, Brake thermal efficiency, Computational Fluid Dynamics, Exhaust discharger system, Fuel Consumption

### **1. INTRODUCTION**

Backpressure on the engine combustion chamber is totally subject to debilitate structure plan, its working condition, and environmental pressure. Various sound decrease procedures are utilized in suppressors, including receptive quieting, resistive hushing, absorptive quieting, and the shell is damping. The properties of engine exhaust emission gases that are important for all the specification of the fluid structure comprises of some physical characteristics; the temperature including its gases that depend on the duty of

the engine and even the trial cycle and also the rate of gas flow. Gas framework materials were introduced to a variety of harsh conditions. These must be highly resistant to certain corrosion-related elements including high-temperature corrosion, condensate & sodium corrosion, increased temperature physical dissatisfaction, stress processing cracking, and entombed granulated utilization.

Mostly during exhaust cycle, while the cylinder travels from the Top Dead Center (TDC) to the bottom dead center (BDC), because of the increased pressure, the exhaust gases flows via the exhaust port pipe. As a consequence, the force needed to drive combustion gases is considered exhaust stroke back-pressure. Engine performance of the device per cycle is related to siphoning work, which would be directly compatible with the back-pressure. In order to restrict siphoning work, back-pressure should be just as minimal as practicable. Back-pressure is reasonably linked to the exhaust gas discharger project proposal. The state of the channeled cone of gases discharger structure contributes to the back-pressure. This rise in back-pressure triggers an increase in fuel usage. Without the need for a question, an elevated pressure loss is a huge challenge to maintain [1], [2].

## **2. DESIGN AND DEVELOPMENT OF EXHAUST GAS DISCHARGER SYSTEM**

Much emphasis was already given by many investigators worldwide, typically on physical elements of the Compression Ignition (CI) engine with its performance assessment aspects through their prior investigations and observations. Improvement in structure design of the exhaust system, with provision of angles explicitly identified for engine exhaust gases exit mechanism to address issue of backpressure generation on the engine, given due consideration and engaged with high skill. An increase in backpressure can be harmful to the engine. A very common backpressure creation phenomenon found through the use of after-treatment devices testing and its various research methods used throughout the exhaust configuration of that same Compression Ignition engine was assessed with back pressure increase in the majority of investigation reporting is observed. All possible conditions are check to minimize backpressure on the engine without effect on working conditions and performance.

At the end of the investigation, it is chosen to have a trial examination for energy proficient gases discharger structure plan and advancement for CI engine emission gases and performance improvement in an additional way. In this total procedure, three vital advances viz. arranging, activity, and information examination ought to be embraced in exploratory arranging step investigation of instruments to be utilized for exactness and precision Errors should be carried out. [3].

## **3. METHODOLOGY**

The research was completed onto six sectors, an existing one that would be EDS-I with 0 ° gulf cones end, EDS-II with 22.5 ° gulf cones end, EDS-III with 0 ° gulf cones end, EDS-IV with 45 ° bay cones side, EDS-V with 60 ° gulf cones end and a modified one which is EDS-VI with 90 ° channels cones end as per table 3.1. Findings are therefore considered. It was shown that when the exhaust structure was changed, the brake thermal efficiency certainly increased. In this way, physical products are designed of the combination of certain two components, and comprehensive tests are completed on them. The outcomes got through CFD investigation are tentatively affirmed.

# Investigation of the Exhaust Discharger System to Reduce Backpressure on the Single Cylinder C. I. Engine.

Table 3.1–Details of developed Exhaust Diffuser Systems

Sr. No	Exhaust Diffuser System Name	Inlet cone angle of Exhaust Diffuser System
1	EDS – I	0 degree
2	EDS – II	22.5 degree
4	EDS – IV	60 degree
5	EDS – V	75 degree
6	EDS – VI	90 degree

In CFD investigation, two significant stream qualities, backpressure and engine execution, are examined.

Study 1: The adjustment in the pressure of the system identified. The modification of the pressure difference in the conduit and exit of the exhaust gas discharge framework was investigated in such findings. For further calculations, the dischargers providing a higher pressure comparison are selected.

Study II: Again for channel design, newly prepared model with larger pressure comparison is taken into consideration. It is tested and its performance is interpreted and investigated. Discharger’s backpressures levels are represented and interpreted for further investigation, discharger who have got the lower backpressure were used for further experimental analysis of engine operation and testing. [4].

## 4. CFD ANALYSIS

By Fluent software, the layout for both the exhaust gas discharger device is planned for review and investigation.

### 4.1 Modeling

Tetrahedral mesh and refined mesh element near the wall is used for drawing.

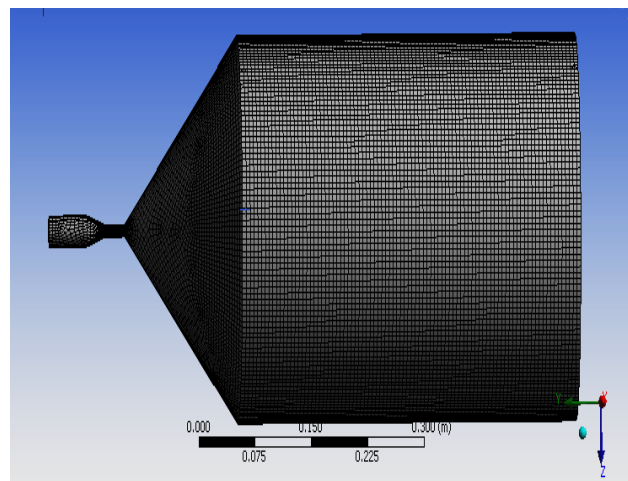



Figure 1. Meshing model of the system

## 4.2 Boundary Conditions


Boundary parameters which are considered with mass flow rates of gases through the discharger inlets include working medium temperatures as well as output pressure, is implemented on the system under consideration as shown in figure 1 and its geometry is prepared as shown in figure 2 with its flow visualization in shown in figure 3 for further ease of system performance investigation. For system wall condition parameters, 'without Slip' is taken and  $48 \text{ w / m}^2\text{°k}$  heat transfer rate with 0.00590 mm roughness of its side wall surface is considered. [5]

## 5. RESULTS AND DISCUSSIONS

The optimal shape of discharger is found out first by using various geometry of the EDS, which found useful in reducing the backpressure substantially. [6]

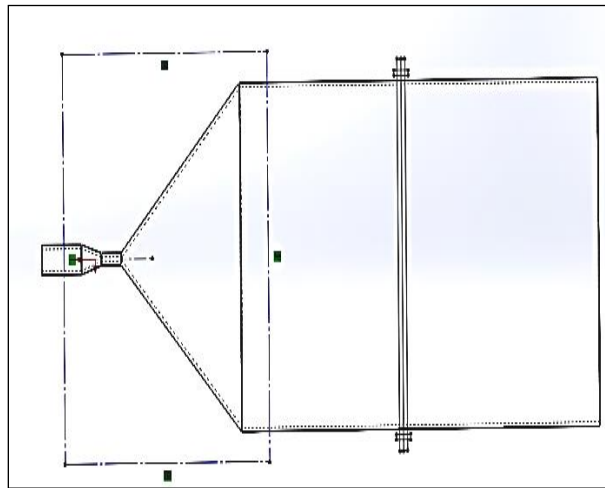


**Figure 2. Selected Geometry**

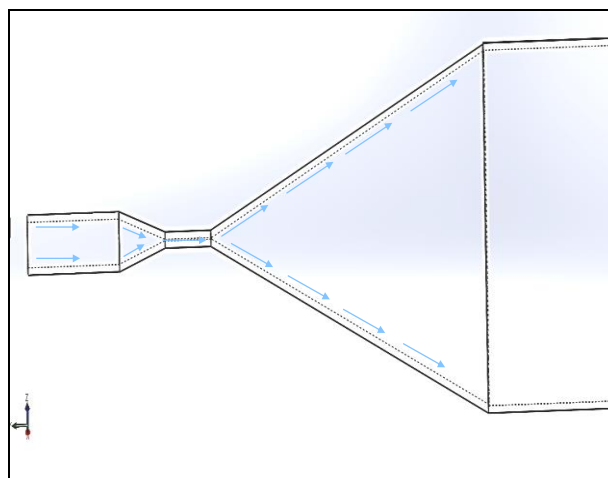


**Figure 3. Flow visualization in component**

# Investigation of the Exhaust Discharger System to Reduce Backpressure on the Single Cylinder C. I. Engine.


EDS-I input backpressure, pressure variation is observed to be at 1660 Pa and can be seen in Figures 4 and figure 10. It is because of the lower pressure generation at lower load application on the engine, the static pressure counter seems to be decreasing as shown in figure 4 and as observed in the figure 10, as the variation of static pressure with respect to position or location of the exhaust gas in the discharger. It is observed that with increased length of EDS and its inlet pressure, the backpressure may tends to get boost.

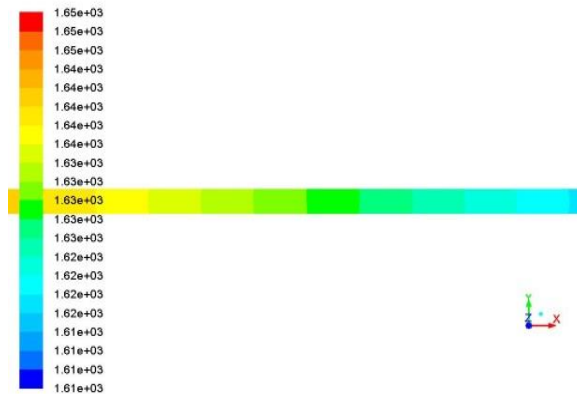


**Figure 4.** The pressure contours for EDS – I at constant Load 5 Kg.

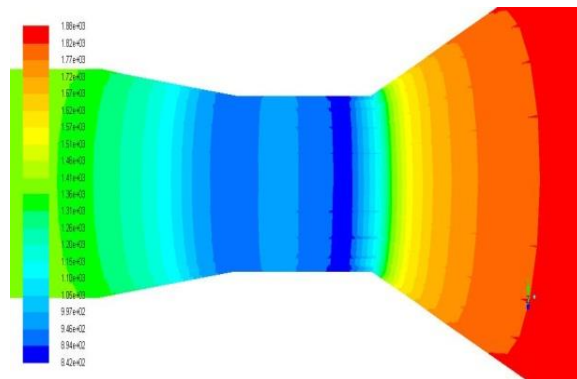


**Figure 5.** The pressure contour for EDS – II at constant Load 5 Kg.

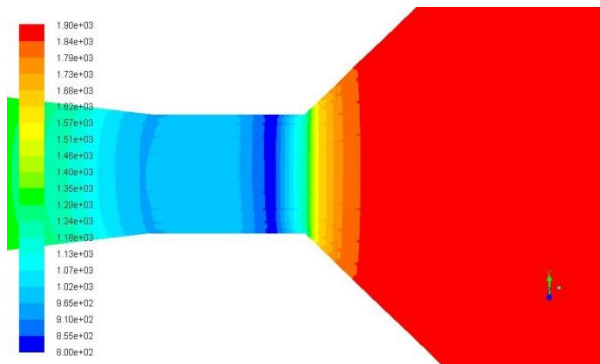


**Figure 6.** The pressure contour for EDS – III at constant Load 5 Kg.

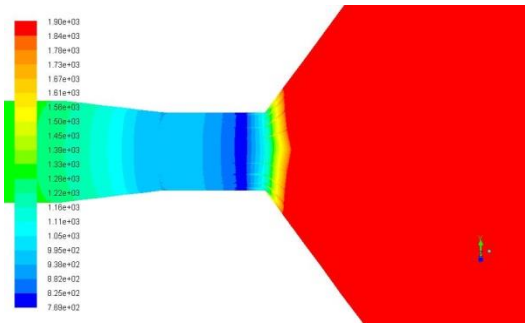

**Figure 7.** The pressure contour for EDS – IV at constant Load 5 Kg.

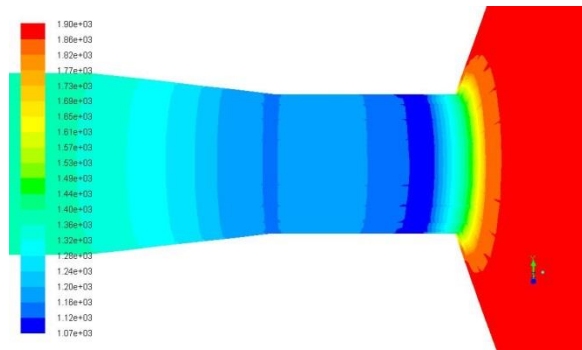


**Figure 8.** The pressure contour for EDS – V at constant Load 5 Kg.

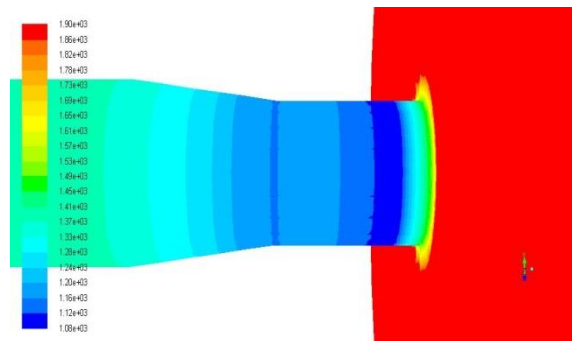


**Figure 9.** The pressure contour for EDS – VI at constant Load 5 Kg.

It is observed from the figure 4 to 9 Pressure contour for EDS – I to EDS – VII at constant load 5 Kg; it is observed that from EDS – I to EDS – VII static pressure difference at inlet and outlet of Exhaust Diffuser System increases.


Investigation of the Exhaust Discharger System to Reduce Backpressure on the Single Cylinder C. I. Engine.

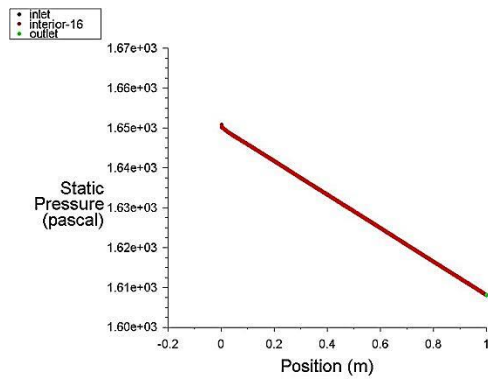


**Figure 10.** Variation in backpressure on engine during the flow through EDS – I at constant Load 5 Kg.

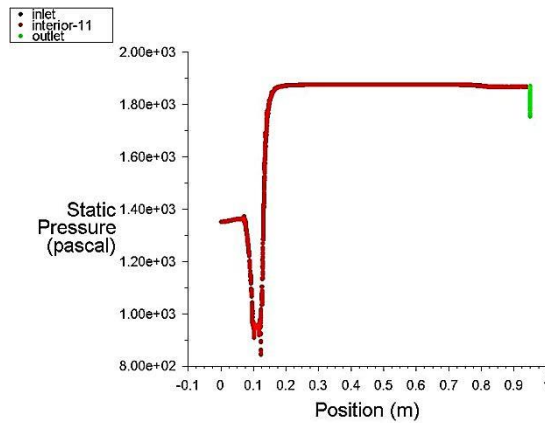


**Figure 11.** Variation in backpressure on engine during the flow through EDS – II at constant Load 5 Kg.

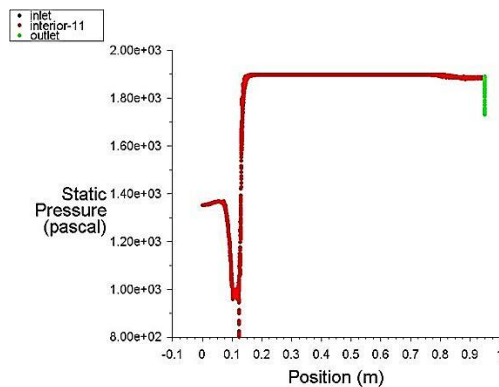


**Figure 12.** Variation in backpressure on engine during the flow through EDS – III at constant Load 5 Kg.

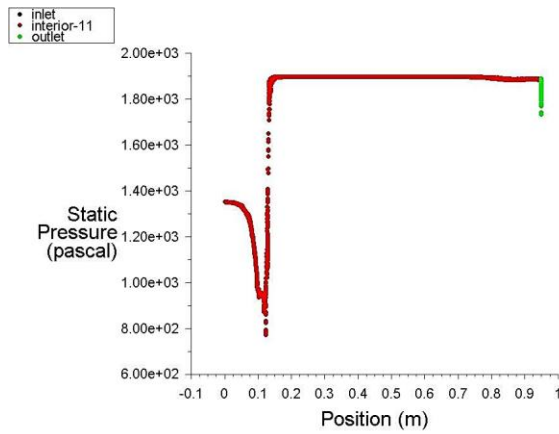

**Figure 13. Variation in backpressure on engine during the flow through EDS – IV at constant Load 5 Kg.**

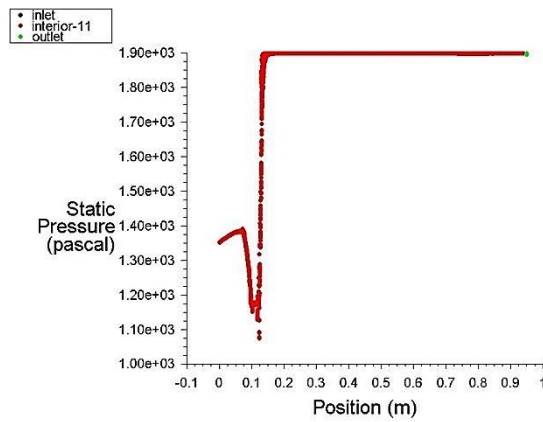

**Figure 14. Variation in backpressure on engine during the flow through EDS – V at constant Load 5 Kg.**

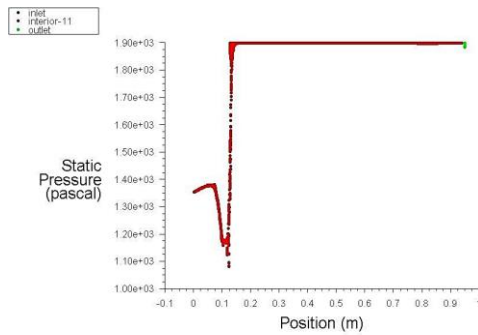

**Figure 15. Variation in backpressure on engine during the flow through EDS – VI at constant Load 5 Kg.**




## Investigation of the Exhaust Discharger System to Reduce Backpressure on the Single Cylinder C. I. Engine.

It is observed from the figure 04 to 09 pressure versus position along its length for EDS – I to EDS – VII at constant load 5 Kg; it is found that from EDS – I to EDS – VII static pressure with respect to position along its length increases.


- |      |                |             |      |                 |
|------|----------------|-------------|------|-----------------|
| 1    | Fuel           | Flow        | 5    | CI Engine       |
|      |                | Measurement |      |                 |
| 2    | U-             | Tube        | 6    | Exhaust Gas     |
|      | Manometers     |             |      | Calorimeter     |
| 3    | Dynamometer    |             | 7    | Exhaust System  |
| 4    | Air Flow Meter |             |      |                 |
| X-X: | Entry          | to          | Y-Y: | Exit to Exhaust |
|      | Exhaust        | Gas         |      | gas Discharger  |
|      | Discharger     |             |      |                 |

### 6. Experimental Validation

For the EDS-1 to EDS-6, the observational work was carried out in single-chamber four-stroke diesel engine setup as shown in figure 16 (block diagram) and actual photograph of experimental setup used shown in figure 17& 18 is tested with experimentation for discharger. The brake thermal efficiency is finding out by performance testing. [8], [9]

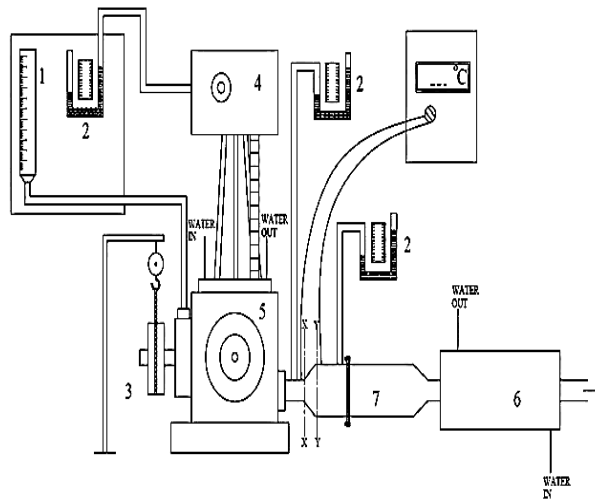


**Figure 16. Schematic view of experimental setup**

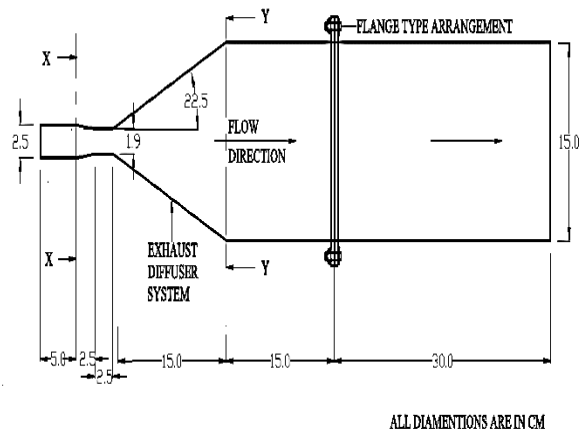

**Figure 17. Schematic view of Exhaust Discharger System (EDS)**




**Figure 18. Diagram for Different Gases Discharger Systems**

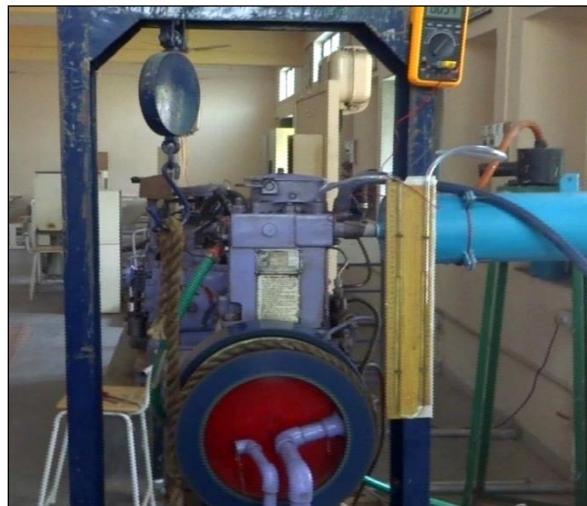

**Figure 19. Experimental setup**


Investigation of the Exhaust Discharger System to Reduce Backpressure on the Single Cylinder C. I. Engine.

The variations of brake thermal efficiency are demonstrated in figure 20. Increase in brake thermal efficiency is calculated by using the EDS-2. There seems to be 1 to 5 percent improvement in brake thermal efficiency at low load conditions and approximately 1% to 4% improvement in brake thermal efficiency observed at full load conditions as compared to EDS-1.

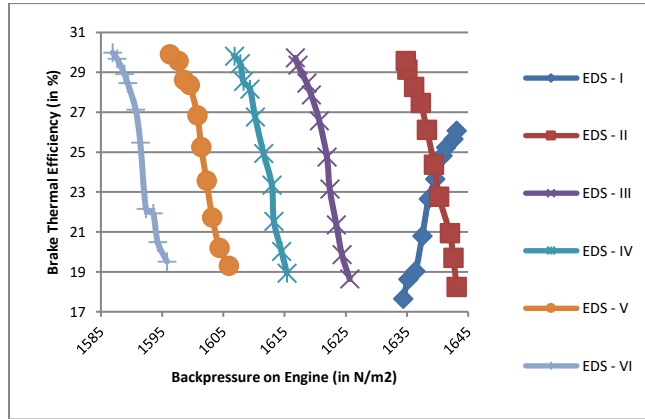

**Figure 20. Brake thermal efficiencies Vs. backpressure using Exhaust Discharger Systems on the engine with different load conditions.**


Figure 21 indicates the discrepancy between the heat redirected through exhaust gases as well as the CI engine backpressure then using exhaust discharge mechanism for different pressures. The opportunity for heat redirected by EDS-1 flue gas decreases pressure and increases pressure. It is often found to decrease backpressure to engine also decreases including thermal efficiency, if redirected through exhaust gases from EDS-6. In comparison to EDS, thermal efficiency redirected through exhaust gases decreases approximately 4.1 percent again for EDS-VI configuration.

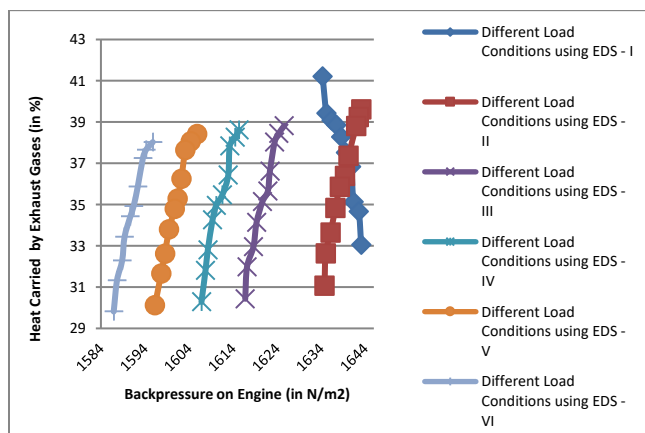


**Figure 21. Heat variations carried through exhaust gases utilizing various Exhaust Discharger Systems in percent Vs. backpressure upon this engine.**

Figure 22 gives varieties of pressure on the engine using values saw during experimentation against diverse burden cases for exhaust discharger structure; when the pressure is kept consistent burden at various levels like From 0.5-5 kg, that engine backpressure becomes decreased. Because as workload

increases, the potential for back pressure mostly on engine with EDS-1 increases. Furthermore, for EDS-6, this demonstrates backpressure for engine reductions. An increment in brake efficiency can be seen with reduction in back pressure on the system.

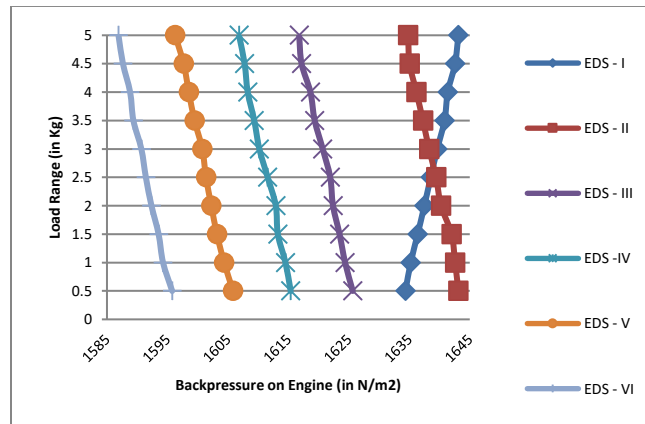

**Figure 22. Backpressure of its engine by using test vs. different loads of the Exhaust Discharger.**

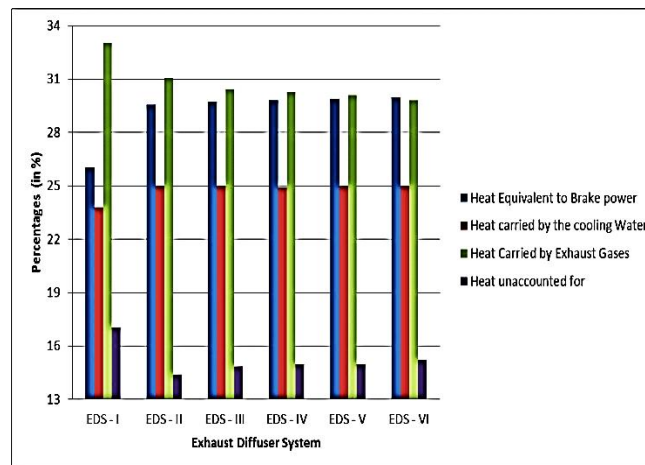

**Figure 23. Heat balance sheets for discharger at load 5 Kg**

Figure.23 results in heat accounting report of various discharger structure at steady load of 5 kg; the thermal efficiency monetary record things They are heat transfer rate , brake power, heat transmitted by the surface of coolant, heat transmitted by pollutants and thermal efficiency.

At the stage where the configuration of its gas discharger changes mostly during variance in EDS-1 to EDS-6, reason might be attributed to the rise in brake power as well as the thermal efficiency of its exhaust gases is decreased. As a result of the project, this has been found that almost 28 to 38 per cent of fuel energy is wasted; Which leads in a rise in the use of gas energy. It is essential for using energy by adequate design of the gas exhaust mechanism.

## 7. CONCLUSIONS

The discharger is effectively structured for the C. I. engine. CFD analysis is carried out for the different shapes of the discharger. An increase in the entrance portion area of the EDS expands pressure profile of the flow, which is responsible for the generation of Back pressure phenomenon, which minimizes the pressure distribution zone. Testing has been done with various edges. The dischargers, i.e. 0, 22.5, 30, 45, 60 and 90 degrees, are prepared with input of a Compression ignition engine test bench exhaust emission end as well as appropriate measuring instruments, different parameters of pressure, temperature, its volume of its discharge pollutants are measured. The exhaust pollutants from compression ignition engine have now been used to transform the kinetic energy along with its exhaust gas enthalpy into pressure energy of quality during gas treatment. This pressure is used and sent across the discharger for reduction the backpressure. Assembly including its EDS – VI increases the thermal efficiency of its brake thus decreases backpressure.

This report offers the investigative qualities obtained mostly during engine backpressure experiment, and the importance of using the CFD backpressure experiment upon this engine provides the authenticity of the knowledge necessary to achieve the energy generation mechanism of the gas. This has only been made possible by the approach followed in this study.

## ACKNOWLEDGMENT

The authors would really like to appreciate the AISSMS College of Engineering, Pune, Dr. D.Y. Patil Institute of Technology, Pimpri, Pune, also G. H. Raisonni College of Engineering, Nagpur, besides supplying us with a library, all technical and several other resources were required to carry out original research.

## REFERENCES

1. J. B. Heywood; "Internal Combustion Engine Fundamentals"; McGraw –Hill, ISBN 0-07-100499-8, 1988.
2. Incropera, F.P.; DeWitt, D.P. Introduction to Heat Transfer; John Wiley & Sons: New York, NY, USA, 2011.
3. Konstantinidis, P.A.; Koltsakis, G.C.; Stamatelos, A.M. Transient heat transfer modelling in automotive exhaust systems. Proc. Inst. Mech. Eng. C J. Mech. Eng. Sci. 1997, 211, 1–15.
4. Kandylas, I.P.; Stamatelos, A.M. Engine exhaust system design based on heat transfer computation. Energy Convers. Manag. 1999, 49, 1057–1072.
5. Kapparos, D.J.; Foster, D.E.; Rutland, C.J. Sensitivity Analysis of a Diesel Exhaust System Thermal Model. SAE Tech. Pap. 2004.
6. Fortunato, F.; Caprio, M.; Oliva, P; D'Aniello, G.; Pantaleone, P.; Andreozzi, A; Manca, O. Numerical and Experimental Investigation of the Thermal Behavior of a Complete Exhaust System. SAE Tech. Pap. 2007.

7. Chuchnowski, W; Tokarczyk, J; Stankiewicz, K.; Woszczynski, M. Method for modelling temperature distribution in exhaust system of diesel engine in the light of mine systems of heat recuperation. *J. KONES Powertrain Transp.* 2001, 18, 101–108.
8. Durat, M.; Parlak, Z.; Kapsiz, M.; Parlak, A.; Fiçici, F. CFD and experimental analysis on thermal performance of exhaust system of a spark ignition engine. *J. Therm. Sci. Technol.* 2013, 33, 89–99. Kandylas I.P, Stamatelos A.M., 1999, B Engine exhaust system design based on heat transfer computation, *Energy Conversion & Management*, 40, 1057-1072.
9. Meisner S. and Sorenson S., 1986, Computer Simulation of Intake and Exhaust Manifold Flow and Heat Transfer, SAE Technical Paper, 860242, doi:10.4271/860242.
10. Depcik C. and Assanis D., 2002, A Universal Heat Transfer Correlation for Intake and Exhaust Flows in an Spark-Ignition Internal Combustion Engine, SAE Technical Paper, 2002-01-0372, doi:10.4271/2002-01-0372.
11. Sorin A., Bouloc F., Bourouga B., Anthoine P., 2008, Experimental study of periodic heat transfer coefficient in the entrance zone of an exhaust pipe, *International Journal of Thermal Sciences*, 47, 1665–1675.
12. Sumesh VK, Pravin K, Rajagopal K (2013) CFD Analysis of Exhaust Manifold of Multi-Cylinder Si Engine To determine Optimal Geometry for Reducing Emissions. *International Journal of Automobile Engineering Research and Development* 3: 45-56.
13. Colucci, PJ, Lee D, Lim CK, Goldin G (2002) In-cylinder Engine Modeling Developments at Fluent. Twelfth International Multidimensional, Lebanon, NH.
14. Galindo, J.; Dolz, V.; Royo-Pascual, L.; Haller, R.; Melis, J. Modeling and Experimental Validation of a Volumetric Expander Suitable for Waste Heat Recovery from an Automotive Internal Combustion Engine Using an Organic Rankine Cycle with Ethanol. *Energies* 2016, 9, 279.
15. Zhang, X.; Romzek, M. Computational Fluid Dynamics (CFD) Applications in Vehicle Exhaust System. SAE Tech. Pap. 2008.
16. R G Silver, J. C. Summers and W. B. Williamson "Design and Performance Evaluation of Automotive Emission Control Catalysts", Evier Science Publishers B. V. Amsterdam, 1991.
17. Desmond E Winter Bone & Richard J Pearson, "Theory of Engine Manifold Design", Professional Engineering Publishing, 2000.
18. G.Venkatesh, "Power Production Technique Using Exhaust Gas From Present Automobiles via Convergent-Divergent Nozzle", 0-7803-9794-0/06 IEEE, 2006.
19. J. D. Anderson, Jr., "Computational Fluid Dynamics - The Basic with Applications", McGraw - Hill International Editions, 1995.
20. Meda LakshmiKantha & Mathias Keck, "Optimization of Exhaust Systems", SAE Paper No. 2002-01-0059, 2002.
21. D. S. Deshmukh, J. P. Modak and K.M. Nayak, "Experimental Analysis of Backpressure Phenomenon Consideration for CI Engine Performance Improvement" SAE Paper No. 2010-01-1575, International Powertrains, Fuels & Lubricants Meeting, Rio De Janeiro, Brazil, on dated- 5 May 2010.
22. Bolt J, Bergin S, Vesper F. The influence of the exhaust back pressure of a piston engine on air consumption, performance, and emissions. SAE technical paper 730195; 1973.

Investigation of the Exhaust Discharger System to Reduce Backpressure on the Single Cylinder C. I. Engine.

23. N. Burnete, D. Moldovanu, D.-L. Baldean, L. Kocsis; "Studies regarding the influence of exhaust backpressure on the performances of a compression ignited engine" Proc Eur Autom Congr EAEC-ESFA, 2015 (2015), pp. 141-149
24. Masoudi, M., Zink, U., Then, P., Cash, T., Thompson, D., Heibel, A. Predicting pressure drop of wall-flow diesel particulate filters - theory and experiment. SAE paper 2000-01-0184, 2000.
25. Masoudi, M., Heibel, A., and Then, P., "Predicting Pressure Drop of Wall-Flow Diesel Particulate Filters - Theory and Experiment," SAE Technical Paper 2000-01-0184, 2000, <https://doi.org/10.4271/2000-01-0184>.
26. Hountalas, D., Katsanos, C., and Lamarinis, V., "Recovering Energy from the Diesel Engine Exhaust Using Mechanical and Electrical Turbocharging," SAE Technical Paper 2007-01-1563, 2007, <https://doi.org/10.4271/2007-01-1563>.
27. Nagisetty, B.G., Venkata, S.H.P. (2020). Sequential procedure for improving the efficiency of CI engine by using artificial neural networks. International Journal of Heat and Technology, Vol. 38, No. 4, pp. 949-959. <https://doi.org/10.18280/ijht.380422>
28. Sudarmanta, B., Mahanggi, A.A.K., Yuvenda, D., Soebagyo, H. (2020). Optimization of injection pressure and injection timing on fuel sprays, engine performances and emissions on a developed DI 20C biodiesel engine prototype. International Journal of Heat and Technology, Vol. 38, No. 4, pp. 827-838. <https://doi.org/10.18280/ijht.380408>.
29. Xu, J.M., Zhou, S.T., Li, K.S. (2015). Analysis of flow field and pressure loss for fork truck muffler based on the finite volume method. International Journal of Heat and Technology, Vol.33, No.3, pp.85-90. <http://doi.org/10.18280/ijht.330312>
30. Wang, J.G., Wang, X.R., Zhang, J.X., Wang, X. (2015). Numerical simulation of marine low-speed diesel engine and single hole spray. Review of Computer Engineering Studies, Vol. 2, No. 3, pp. 35-40. <http://dx.doi.org/10.18280/rces.020307>