

## **Design Optimization of Hz Flow Constructed Wetland for Sustainable Environmental Management (Proposed Modelat Hudiara Drain)**

**Habiba Mohsin<sup>1</sup>, Norheen Amina<sup>2</sup>, Imran Shahbaz<sup>3</sup>, Amina Irfan<sup>4</sup>, Ahsan Shahbaz<sup>5</sup>**

1 Lecturer, The University of Lahore, Pakistan. habiba.mohsin@tech.uol.edu.pk2 Lecturer, The University of Lahore, Pakistan. norheen.amina@tech.uol.edu.pk3 Assistant Manager HSE Jeddah, KSA. imranshahbaz26@gmail.com

4 Lecturer, The University of Lahore, Pakistan. amina.irfan@tech.uol.edu.pk

5 HSE Consultant, PAK Safety Solutions, Lahore Pakistan. ahsanshahbaz19@gmail.com

### **ABSTRACT**

In developing countries water pollution is one of the main threats to public health. Thus, it is essential to reuse wastewater to struggle for water scarcity and to look after the available water sources by treating wastewater resulting from human activities. In Pakistan annual per capita water accessibility has been reduced from 5,260 to 1,038 cubic meters from 1951 to 2010 respectively. If this condition continues then the water availability in Pakistan will reduce to 877 cubic meters per annum by 2020 and will further go down to a distressing point of 575 m<sup>3</sup> in 2050. In view of lack of resources and skilled manpower, required for sophisticated wastewater treatment technologies, there is need to examine the low cost wastewater treatment technologies like constructed wetlands. CWs are engineered systems that have been designed and constructed to make use of the natural processes involving wetland vegetation, soils and the associated microbial assembly. This study shows that horizontal sub surface flow constructed wetland has been designed to check the efficiency in removing pollutants from Hudiara drain. The findings reveal that as compared to other conventional treatment systems, constructed wetlands are low cost, easily operated, and require minimum energy demand. For developing countries like Pakistan with limited technology and facing energy problems, constructed wetlands can be used for wastewater treatment.

### **KEYWORDS:**

Constructed Wetland, Economical Wastewater Treatment, Sustainability, Wastewater Management, Removal of Pollutants, Hudiara Drain, Environmental Management.


### **INTRODUCTION**

The population of world is increasing at alarming rate, mostly in urban center of Asia. The United Nations center for human settlements estimates that the urban population in Pacific region and in Asia is estimated to rise from 991 million to 2.44 billion among 1991 and 2020. It reflects that urban center of Asian cities will have to accommodate 1.4 billion more people. Hence, basic services, like water and sanitation to the public will be destabilized due to this quantum rise in population. Relocation from rural to urban areas is the main reason of increase in urban population (Islam-ul-Haque, 2015).


Water is an inadequate supply and, most significantly, it is poorly dispersed geologically. Moreover, ever growing population existing on Earth is anticipated to be the root of numerous convicts in the future (Dordio 2013).

Figure 1 facilitates the idea of presenting how water is an inadequate resource; the major sphere represents all of Earth's water (estimated diameter 1384.0 km), the intermediary corresponds to Earth's liquid fresh water (i.e. groundwater, lakes, swamp water and rivers) and the smallest one is the water in lakes and rivers.

**Figure 1 Earth's Water Shown in Spheres (Samsó, 2014)**

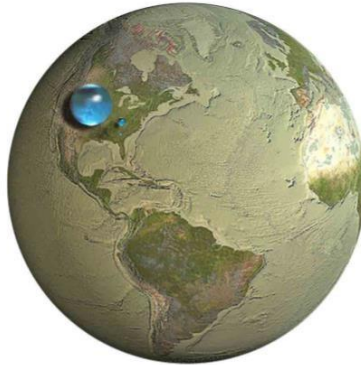

The per capita water accessibility has been decreased more than 46% from 5,260 m<sup>3</sup> to 1,038m<sup>3</sup> from 1951 to 2010, in Pakistan. If the condition continues, then, the water availability in Pakistan will further reduce to 877 m<sup>3</sup> per annum by 2020 and will further go down to a distressing point of 575 m<sup>3</sup> in 2050 (Mustafa, 2013). Per capita water accessibility decreasing in Pakistan is shown in figure, below;

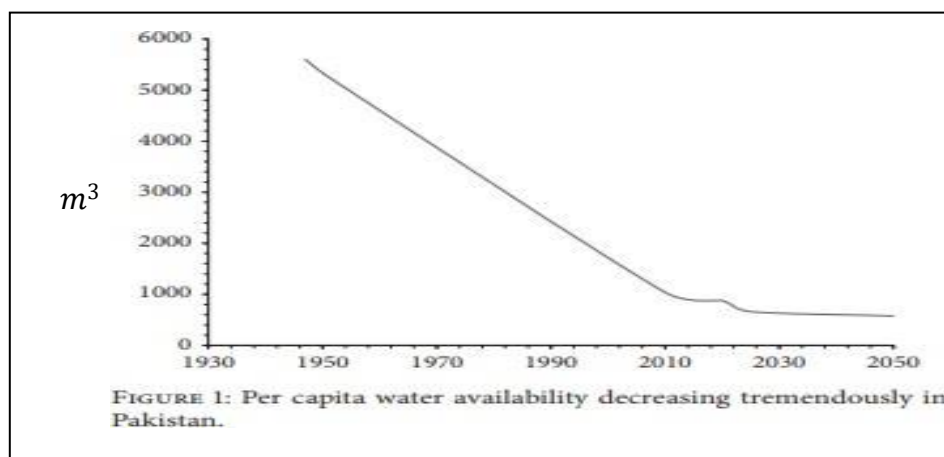

**Figure 2 Per capita Water Accessibility Decreasing in Pakistan (Mustafa, 2013).**

Water is a source for a large variety of anthropogenic activities, ranging from agriculture to industry. Generally, after achieving its primary purposes, the water is discharged in sewers/surface water bodies as wastewater due to the occurrence of contaminants in it (Zahra. S et al., 2012). Water bodies have been considered as spots for dumping of domestic and industrial wastewater which involve suitable treatment, with the passage of time (Kalbar P.P, et al., 2012) .

Domestic and industrial enterprises discharge wastewater that is the mixture of water and redundant products. Treatment of wastewater before its disposal to the fresh water bodies is very essential as it adds nutrients, heavy metals and other noxious waste in receiving water bodies (Su et al., 2014). The use of wastewater is one of the alternating ways for irrigation for farming production (Khurana et al., 2012).

Concerns associated to water scarcity and wastewater disposal can concurrently solved by reuse of wastewater, as bio-fertigation. Chemical precipitation, lime coagulation, ion exchange, aeration, chemical oxidation, electrolysis, ultra-filtration, and chlorination techniques are being used for wastewater treatment across the world but all the techniques are costly (Mishra and Tripathi, 2016). Wastewater can be treated in a controlled, environmental protective and cost-effective manner, by various natural methods like natural ponds and wetlands (Mustafa, 2013). . For wastewater treatment constructed wetland (CW) is a well-known environmental protective technique. Surface flow and subsurface flow are the two basic varieties of constructed wetlands system. These systems

utilize soil and aquatic plants. To eliminate the containments from wastewater physical, chemical, biological and biochemical processes play role in a constructed wetland system(CWS) (Vymazal, 2010).

This study is planned to design a horizontal subsurface flow (HSSF) constructed wetland system for treatment of wastewater carried by huduiara drain. To eradicate the contaminants from wastewater horizontal subsurface flow constructed wetland is an engineered structure which utilizes the aquatic plants and natural processes (Oladipupo et al., 2015). The HSSF wetland system works on the principle of phyto-remediation in which aquatic plants extort the contaminants through their roots from wastewater. This structure works like natural method that can eliminate the multi-pollutants from wastewater with merely a single plant (David, A. F. 2006). Many plants can be used in the wetland for elimination of contaminants. However environment, nature of wastewater and nutrients to be removed affect the plant selection criteria (Pawan et al., 2015).


## **LITERATURE REVIEW**

A constructed wetland is an artificial shallow basin filled with substrate, usually soil or gravel, and planted with vegetation that has tolerance to saturated conditions. Water is then directed into the system from one end and flows over the surface (surface flow) or through the substrate (subsurface flow) and gets discharged from the other end at the lower point through a weir or other structure, which controls the depth of the water in the wetland (Donde Oscar Omondi et al, 2020).

Pollutants such as heavy metals, surfactants, pharmaceuticals and personal care products are also removed but that are not commonly targeted when designing municipal wastewater treatment systems (Vera et al., 2011). Constructed wetland systems contain a simulated substrate bed for the plant, a bio-film and emerging macrophytes above the water surface. The substrate frequently consists of a combination of sand and gravels. The bio-film contains algae, fungi and bacteria over substrate and plant stem surface.(Hoffmann et al, 2011).

### Subsurface Flow Constructed wetlands (SSFCW)

It's one of the layer is filled with gravels or other aggregates whose level is above water level to avoid contact of wastewater to the layer exposed to air. It is provided with polyethylene line or reinforced concrete to make it. Free water surface, Vertical Flow and Horizontal Flow are major types of designs within SSFCW (Mthembu et al., 2013) (Khanijo, 2002). CW systems contain a simulated substrate bed for the plant, a bio-film and emerging macrophytes above the water surface. The substrate frequently consists of a combination of sand and gravels. The bio-film contains algae, fungi and bacteria over substrate and plant stem surface (Hoffmann, Platzer, Winker, & von Münch, 2011) (Mahmood et al., 2013). In soil sand and gravel-based humid zones, CW with subsurface flow may be graded horizontally and vertically according to the direction of flow (Richard O. B. Makopondo et.al, 2020)

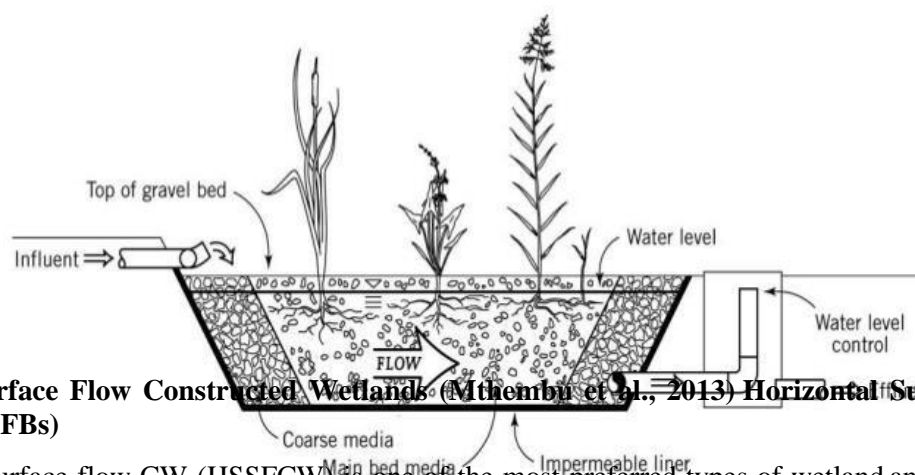


**Figure 3 Subsurface Flow Constructed Wetlands (Mthembu et al., 2013) Horizontal Sub Surface Flow Beds (HSSFBS)**

Horizontal sub-surface flow CW (HSSFCW) is one of the most preferred types of wetland and has been successfully used during the past few decades for the treatment of various types of pollutants from the wastewater (Reetika Shukla et, al, 2021). Particular locations without energy supply and low hydraulic gradient, HSSFBS are a remarkable choice. Below the surface of the bed in a horizontal path, In HSSFBS, the wastewater flows slowly through the porous medium until it reaches the outlet zone (Dhote S, Dixit S 2009) (see Figure 4).

The water level at the outlet in HSSFs is controlled with a regulating standpipe (Samsó, 2014). To avoid anaerobic conditions the submerged height of the bed should be less than one third of the total height of the filter bed (Hoffmann et al., 2011).

**Figure 4 Schematic Representation of a HSSFCW, Flow Circulates from Left to Right (Samsó,**

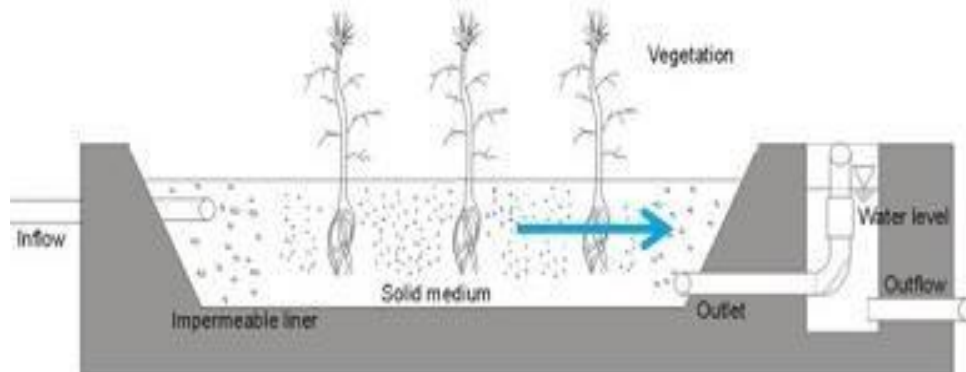

2014)

## WETLAND PLANTS

The essential elements of wetlands are wetland plants. Macrophytes are the large aquatic plants growing in wetlands.

Most repeatedly used plants around the world are:

- *Phragmites australis* (Common reed)
- *Typha* (*latifolia*, *angustifolia*, cattails, *orientalis*) (Surrency, 2010).
- *Scirpus* (e.g. *lacustris*, *validus*, *californicus* and *acutus*) are other commonly used species (Rodriguez & Brisson, 2016).

### Reed (*Phragmites*):

It is a tall and aquatic perennial plant, commonly known as Reed Grass. It matures vertical up to 4 m tall. The plant grows richly in damp and waterlogged areas, both freshwater and brackish, along rivers, ditches, lake shores and ponds. *Phragmites* can spread laterally throughout the year by producing new shoots from spreading rhizomes. This plant grows plentifully in damped and waterlogged areas, both freshwater and brackish, along rivers, ditches, lake shores and ponds. In temperate countries, *Phragmites australis* is extensively used for reed bed treatment systems. *Phragmites* distributes 50% of plant biomass to root and rhizome systems. Enlarged root biomass permit for better oxygen transport into the

substrate, generate a more aerobic environment favoring nitrification reactions (Sikora, 2011).

### WASTEWATER TREATMENT IN WETLANDS:

In wetlands, pollutants like organic matter, suspended solids, pathogens, toxic waste, N and P are removed in wastewater treatment. In wetlands removal of pollutants and nutrients can be done by processes such as physical, chemical and biological (Zahra. S et al., 2012).

**Table 1** Removal Mechanism and Effects of W.W Constituents (Boutilier L et al., 2011) (Khanijo, 2002), (Zahra. S et al., 2012), (Zhang, 2012) (Liu et al., 2015) (Zhang, 2012) (Redmond, 2012), (Amacha et al., 2017), (Dordio and Carvalho, 2013) (Macci et al., 2015) (Bani , 2011) .

Wastewater constituent	Effect on Environment / Human Health	Removal mechanism
Phosphorus	<ul style="list-style-type: none"> <li>Excessive algae growth.</li> <li>Diarrhea</li> <li>Hardening of organs</li> </ul>	<ul style="list-style-type: none"> <li>Matrix sorption</li> <li>Adsorption</li> <li>Uptake by plant</li> </ul>
Nitrogen	<ul style="list-style-type: none"> <li>Depletion of dissolved oxygen</li> <li>Free ammonia toxicity mainly to fishes.</li> </ul>	<ul style="list-style-type: none"> <li>Ammonification, De-nitrification</li> <li>Uptake by plant</li> <li>Adsorption and absorption (sorption)</li> </ul>
Soluble organics	<ul style="list-style-type: none"> <li>Dissolved oxygen consumption by microorganisms for degrading organic matter.</li> </ul>	<ul style="list-style-type: none"> <li>Degradation in the presence of oxygen</li> <li>Degradation in the absence of oxygen</li> </ul>
Metals	<ul style="list-style-type: none"> <li>Carcinogenic</li> <li>Nervous breakdown</li> <li>Cardio vascular tissue damage</li> </ul>	<ul style="list-style-type: none"> <li>Adsorption</li> <li>Uptake by plant</li> <li>Precipitation</li> </ul>
Pathogens	<ul style="list-style-type: none"> <li>Disease transmission</li> </ul>	<ul style="list-style-type: none"> <li>Sedimentation Filtration</li> <li>Die-off naturally</li> <li>Emission of antibiotics from macrophytes</li> </ul>
Total solids (TS)	<ul style="list-style-type: none"> <li>Turbidity that interferes with the penetration of light through the water column</li> </ul>	<ul style="list-style-type: none"> <li>Sedimentation</li> <li>Filtration</li> <li>Chemical processes</li> </ul>

## **OBJECTIVES:**

The specific objectives of the study are as follows:

- To construct a wetland based on horizontal subsurface flow beds (HSSFs) for removal of pollutants in wastewater carried by Hudiara drain.
- To check efficiency of horizontal subsurface flow constructed wetland using reed plant across Hudiara drain.

## **SURVEY FOR SITE SELECTION:**

Various sites along with Hudiara drain were visited to select suitable site to physically accommodate the size of wetland. Availability of wastewater raw materials and plants to be used were also considered in selection of site.


## **SITE DESCRIPTION:**

Hudiara Drain is located at Bhobtiyan Chowk Raiwind Road Lahore, Pakistan. This site was selected because it was the best site for wetland construction. It is located at a distance of 11.3km from The University of Lahore (Old Campus). Figure 5 shows the map of selected site.

## **HUDIARA DRAIN:**

About 30 years ago, the Hudiara was a storm water drain used for irrigation purposes and to drain water into the Ravi. Hudiara Drain originates from Batala of Gurdaspur District Punjab, Indian and run along with the border; enters Pakistan near Laloo village, pass along the eastern suburb of Lahore (Raiwind) and ends up in Ravi. The total length of Hudiara drain is 98.6 km, 44.2 km in Indian territory and 54.4 in Pakistan territory. Annual discharge of Hudiara drain is about 178 cusecs. This drain alone is center of attention for many environmental protection agencies in Pakistan & India due to proven high level of pollution into river Ravi. Figure 6 (a) & 6 (b) show the upstream of Hudiara drain.



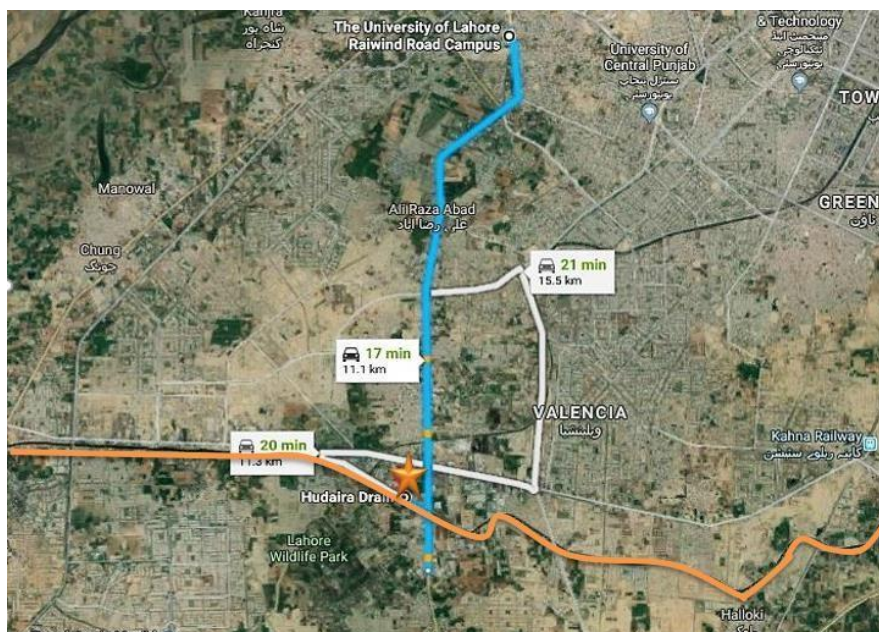

**Figure 5 Site Location**



**Figure 6 Hudaira Drain View (a)**



**Figure 6 Hudaira Drain View (b)**

### SELECTION OF TYPE OF CW:

Different research papers were studied about the basic principle, uses, types, design and operation of constructed wetlands. Many of these researches used different materials and plants and alternate configurations to check the effect on the removal efficiency of the wetlands. The abiotic factors such as oxygen pH and temperature plays a vital role in removing pollutants from wetland (Kirby, 2002). Removal rates are much higher during

warm weather as compared the winter season (Arshad, A., Ali, S, (2017), (Rozema et al., 2016).Horizontal sub surface flow wetland was selected because of the following reasons:

- i. High reduction of BOD, Nitrates, Phosphates, pathogens and heavy metals.
- ii. Does not have the mosquito problems.
- iii. No electricity is required if gravity flow is used.
- iv. Low operating costs.
- v. Fewer odors (Donde, 2020).

Among various species of plants available near site, *Phragmites australis* (Reed) was selected because efficiency of this plant has been reported better than other plants and it was easily available at site area. To determine treatment efficiency, visual inspections and odor checks are generally sufficient at the operator's level (Anurita, 2008), (Davor, 2017).

## DESIGN CRITERIA

Reed method was used to calculate the area of sub surface flow wetland, inflow concentration, influent/effluent BOD concentration, temperature constant, porosity and water depth were selected as design parameters.

$$\frac{Q \ln \left( \frac{C_i}{C_e} \right)}{K_t \times d \times n_v} = \frac{A}{C_e} \dots \dots \dots (1)$$

$$K_t = K_{20} \times \theta_{20}^{(T_w - 20)} \dots \dots \dots (2)$$

**Table 2 Design Parameters**

Parameters	Values	Units
Average daily flow, Q	0.25	m <sup>3</sup> d
Average BOD of influent	230	mg/l
Required BOD	70	mg/l

## DESIGN OF TANKS:

Length to width ratio for this study was assumed 2:1.

Hence the dimensions of the tanks are as follows:

**Primary Tank:**

Length =1.2 m , Width =1.22 m, Depth = 1.54 m


**Constructed wetland:**

Length =2.44 m, Width =1.22 m , Depth = 0.9 m

**Outlet Tank:**

Length =0.7 m, Width =1.22 m , Depth = 0.9 m

Schematic diagram of CW is shown in figure 7

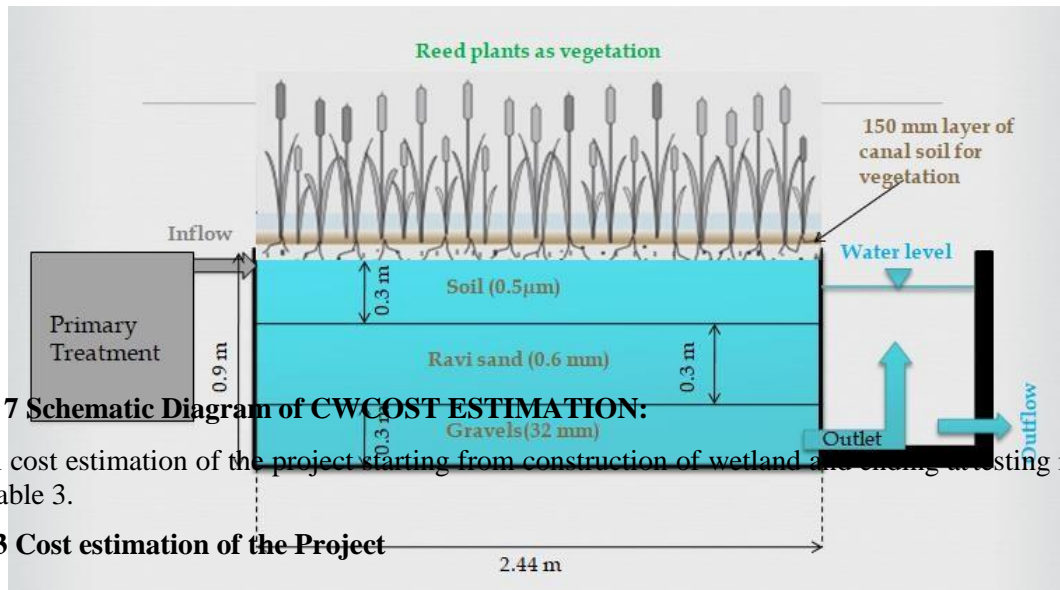

**Figure 7 Schematic Diagram of CW**

Overall cost estimation of the project starting from construction of wetland and channeling is shown in the table 3.

**Table 3 Cost estimation of the Project**

S. No.	Items	Quantity	Total cost (PKR)

Design Optimization Of Hz Flow Constructed Wetland For Sustainable Environmental Management (Proposed Modelat Hudiara Drain)

<b>1</b>	Excavation (Primary, Secondary & Outlet)	45+81+9 cft	1,350 <sup>a</sup>
<b>2</b>	Brickwork (Primary, Secondary & Outlet)	47+143+16 no. of bricks	2,472
<b>3</b>	Bed preparation for seepage control (Primary, Secondary & Outlet) (1:2:4)	9+27+3 sqft	Included in mason charges per day
<b>4</b>	Cement (bed preparation + plastering)	3 bags	2,700 <sup>b</sup>
<b>5</b>	<b>Layers</b> (Secondary tank) Gravels Sand Soil Vegetation	20.25 cft	1,825 <sup>c</sup>
		20.25 cft	506 <sup>d</sup>
		20.25 cft	Locally available <sup>e</sup>
		20.25 cft	
<b>6</b>	Plumbing Work	Valves, pipes, taps connections, etc	3,600 <sup>f</sup>
<b>7</b>	Mason / Labor charge	-	4,500 <sup>g</sup>
<b>9</b>	Transportations charge	Overall	3,600
Overall cost of the project = 20,553 PKR			

<sup>a</sup> 1cft= 5 PKR  
PKR

<sup>b</sup> 1bag of cement= 900 PKR

<sup>c</sup> 1cft=90 PKR

<sup>d</sup> 1cft=25

<sup>e</sup> Sand and Vegetation <sup>f</sup> 1500rs material cost+1,200 plumber fitting charges

<sup>g</sup> 1500 per day (3days)

### CONCLUSIONS:

➤ To check the removal efficiency of constructed wetland the physical and chemical parameters (Biochemical Oxygen Demand, Turbidity, Nitrates and Phosphates, pH) must be taken into the consideration.

- A horizontal sub-surface flow constructed wetland gave a scheme about the common presentation of the system and its effective removal of pollutants.
- *Phragmites australis* (Common reed), *Typha latifolia*, *angustifolia*, cattails, *orientalis*), *Scirpus* (e.g. *lacustris*, *validus*, *californicus* and *acutus* are suitable for removing pollutants.
- Locally available plant Reed (*Phragmites*) is suitable and economical according to the climatic conditions of Pakistan.
- Primary tank plays a vital role in improving efficiency by removing suspended solids in constructed wetland.
- Efficiency of constructed wetland in removing pollutants varies in different seasons, flow rate of wastewater and detention time.

## **RECOMMENDATIONS:**

- Line Departments namely Water and Sanitation Agency Lahore, Environmental Protection Agency, Punjab and Irrigation and Power Department should explore possibilities of construction of wetlands along with the various stretches of Hudaira nullah for minimizing the pollution load being added into River Ravi.
- Since Hudaira drain is a source of pollution it is therefore recommended that a constructed wetland may be provided on a large scale for the treatment of wastewater of this drain to avoid Ravi's pollution.
- As compared to winter, removal efficiency of various pollutants in constructed wetland should be checked in different seasons, at different flow rates (monsoon season and dry weather) and different detention time (minutes, hours and days).
- Removal efficiency of different plant in constructed wetlands should be monitored.
- The removal efficiency of various pollutants in constructed wetland should be analyzed by varying the alignment flow.

## REFERENCES

- 1) Arshad, A., Ali, S., Khan, S. N., Riaz, M., Arshad, S., Arslan, C., Waqas, M. M. (2017). Design of floating wetland for treatment of municipal wastewater and environmental assessment using energy technique. *Proceedings of the International Academy of Ecology and Environmental Sciences*, 7(3), 78–89.
- 2) Anurita, (2008). Design of Research Facilities for Gray water Treatment using Wetlands, MSc. Thesis, Urban Water Center, Colorado State University.
- 3) Bani.P.A, (2011). “Wastewater Management. In: EINSCHLAG, P. F. S. G. (ed.) Wastewater - Evaluation and Management”. In Tech.
- 4) Boutilier L, Jamieson R, Gordon R, Lake C (2011). Modeling E. coli fate and transport in treatment wetlands using the water quality analysis and simulation program. *J. Environ. Sci. Health A Tox. Hazard. Subst. Environ. Eng.* 46(7):680-691.
- 5) David, A. F. (2006). Experiences with Subsurface Flow Wetlands in Wisconsin: A Case Study, Water Environment Foundation.
- 6) Donde Oscar Omondi and Atalitsa Caren Navalía, (August 26th, 2020). Constructed Wetlands in Wastewater Treatment and Challenges of Emerging Resistant Genes Filtration and Reloading. Submitted: December 9th, 2019 Reviewed: June 30th, 2020 Published: DOI: 10.5772/intechopen.93293.
- 7) Dhote S, Dixit S (2009). Water quality improvement through macrophytes - a review. *Environ. Mon. Assess.* 152: 149-153.
- 8) Dordio, A. V. & Carvalho, A. J. P (2013). Organic xenobiotics removal in constructed wetlands, with emphasis on the importance of the support matrix. *Journal of Hazardous materials*, 252, 272-292.
- 9) Hoffmann, H., Platzer, C., Winker, M., & von Münch, E. (2011). Technology review of constructed wetlands: Subsurface flow constructed wetlands for greywater and domestic wastewater treatment. Deutsche Gesellschaft Für Internationale Zusammenarbeit (GIZ) GmbH Sustainable Sanitation - Ecosan Program, 36.
- 10) Islam-ul-Haque, C. (2015). Community Based Sewage Treatment through Hybrid Constructed Wetlands System for Improved Health & Hygiene and for Enhanced Agriculture Productivity / Livelihood Generation in Rural Water Scarce Environments-

Pakistan. American Journal of Environmental Protection, 4(1), 45.  
<https://doi.org/10.11648/j.ajep.20150401.17>

- 11) Kalbar. P. P, Karmakar. S & Asolekar. S. R. (2012). Selection of Appropriate Wastewater Treatment Technology: Scenario Based Multiple attributes Decision-Making Approach. J. Environ. Manage. 113: 158-169.
- 12) Khanijo, I. (2002). Nutrient Removal from Wastewater by Wetland System. Wetlands, 10. Retrieved from <http://home.eng.iastate.edu/~tge/ce421-521/ishadeep.pdf>.
- 13) Kirby, A. (2002). Wastewater Treatment Using Constructed Wetlands. Canadian Water Resources Journal, 27(3), 263–272.
- 14) Khurana. M. P. S & Singh. P. (2012). Waste water use in crop production: A review. Resources and Environment, 2(4): 2163-2618.
- 15) Liu, R., Zhao, Y., Doherty, L., Hu, Y. & Hao, X. (2015). A review of incorporation of constructed wetland with other treatment processes. Chemical Engineering Journal, 279, 220-230.
- 16) Mishra. A & Tripathi. B. D. (2016). Removal of metal ions from aqueous solutions using thermally activated biosorbent Column studies: Proceedings of the International Academy of Ecology and Environmental Sciences, 6(4): 119-127.
- 17) Macci, C., Peruzzi, E., Doni, S., Iannelli, R. & Masciandaro, G. (2015). Ornamental plants for micro pollutant removal in wetland systems. Environmental Science and Pollution Research, 22, 2406-2415.
- 18) Mahmood. Q, Pervez. A, Zeb. B. S, Zaffar. H, Yaqoob. H, Waseem. M & Afsheen. S. (2013). “Natural treatment systems as sustainable eco technologies for the developing countries”. Bio Med research international.
- 19) Mthembu, M., Odinga, C., Swalaha, F., & Bux, F. (2013). Constructed wetlands: A future alternative wastewater treatment technology. African Journal of Biotechnology, 12(29), 4542–4553. <https://doi.org/10.5897/AJB2013.12978>.
- 20) Mustafa, A. (2013). Constructed Wetland for Wastewater Treatment and Reuse: A Case Study of Developing Country. International Journal of Environmental Science and Development, 4(1), 20–24. <https://doi.org/10.7763/IJESD.2013.V4.296>.

- 21) Oladipupo. S, Oladejo, Olabamiji. M et al. (2015). Wastewater treatment using constructed wetland with water lettuce. *International Journal of Chemical, Environmental & Biological Sciences*, 3(2): 119-124.
- 22) Pawan K.G, Kumar N & Kumar M. (2015). Phyto-remediation of waste water through aquatic plants for the change detection analysis in the chemical properties within the district dhanbad, Jharkhand. *International Journal of Research in Engineering and Technology*, 2(4): 243-252.
- 23) Punjab Environmental Quality Standards for Drinking Water, (2016). Government of Punjab Law and Parliamentary Affairs.
- 24) Redmond, E. (2012). Nitrogen removal from wastewater by an aerated subsurface flow constructed wetland, 80. Retrieved from <http://ir.uiowa.edu/etd/2971> <http://ir.uiowa.edu/etd/2971> <http://ir.uiowa.edu/etd/2971>.
- 25) Richard O. B. Makopondo, Laban K. Rotich, and Cynthia G. Kamau, 2020, Performance of horizontal flow constructed wetland for secondary treatment of domestic wastewater in a remote tribal area of Central India. *Potential Use and Challenges of Constructed Wetlands for Wastewater Treatment and Conservation in Game Lodges and Resorts in Kenya*.
- 26) Rodriguez, M., & Brisson, J. (2016). Does the combination of two plant species improve removal efficiency in treatment wetlands? *Ecological Engineering*, 91, 302–309. <https://doi.org/10.1016/j.ecoleng.2016.02.047>.
- 27) Rozema, E., Vander Zaag, A., Wood, J., Drizo, A., Zheng, Y., Madani, A., & Gordon, R. (2016). Constructed Wetlands for Agricultural Wastewater Treatment in Northeastern North America: A Review. *Water*, 8(5), 173. <https://doi.org/10.3390/w8050173>.
- 28) Samsó, R. (2014). Numerical modelling of Constructed Wetlands for wastewater treatment, 202.
- 29) Sikora, F. T. (2011). Ammonium removal in constructed wetlands with re-circulating subsurface flow: removal rate and mechanisms (eds. Kadlec, R.H. & Brix, H.). *Water Science and Technology*.
- 30) Surrency, G. A. (2010). Evaluation of aquatic plants for constructed wetlands for Water Quality improvement.



- 31) Su. C, Zhang. W. J & Jiang. L. Q. (2014). A review on heavy metal contamination in the soil worldwide: Situation, impact and remediation techniques. *Environmental Skeptics and Critics*, 3(2): 24-38.
- 32) Vera, I., Garc'ia, J., S'aez, K., Moragas, L., Vidal, G. (2011). Performance evaluation of eight years' experience of constructed wetland systems in Catalonia as alternative treatment for small communities. *Ecological Engineering* 37, 364–371. doi:10.1016/j.ecoleng.2010.11.031.
- 33) Vymazal, J. (2010). Constructed Wetlands for Wastewater Treatment. *Water*, 2(3), 530–549. <https://doi.org/10.3390/w2030530>.
- 34) Zahra. S, Abbas. Q, Tahir. U & Tariq. A. (2012). “Detailed design of constructed wetland for Lahore”, M.Sc. Thesis, Institute of Environmental Engineering & Research, University of Engineering & Technology, Lahore.
- 35) Zhang, Y. (2012). Design of a Constructed Wetland for Wastewater Treatment and Reuse in Mount Pleasant, Utah. Master Thesis, 1–98. Retrieved from <http://digitalcommons.usu.edu/cgi/viewcontent.cgi?article=1232&context=gradreports>.